

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 233 536 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:

21.08.2002 Bulletin 2002/34

(21) Application number: 01970238.0

(22) Date of filing: 27.09.2001

(51) Int Cl.7: H04B 1/707, H04J 13/04

(86) International application number:

PCT/JP01/08415

(87) International publication number:

WO 02/029998 (11.04.2002 Gazette 2002/15)

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 29.09.2000 JP 2000300148

29.09.2000 JP 2000300790

(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL
CO., LTD.

Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:

• NISHIO, Akihiko
Yokosuka-shi, Kanagawa 239-0847 (JP)

• FUJII, Hideo
Yokosuka-shi, Kanagawa 239-0847 (JP)

• HAYASHI, Masaki
Yokosuka-shi, Kanagawa 239-0847 (JP)

(74) Representative: Grünecker, Kinkeldey,

Stockmair & Schwanhäusser Anwaltssozietät

Maximilianstrasse 58

80538 München (DE)

(54) **DEMODULATOR AND DEMODULATING METHOD**

(57) The number of spreading codes multiplexed in a received signal is detected, and switches 4 and 5 are switched to the RAKE demodulation section 2 side if the detected number of spreading codes is less than a predetermined threshold value, and to the JD demodulation

section 3 side if greater than or equal to the predetermined threshold value. As a result, joint detection demodulation is used only when the number of multiplexed spreading codes is large—that is, when the number of users is large—and consequently power can be saved during demodulation.

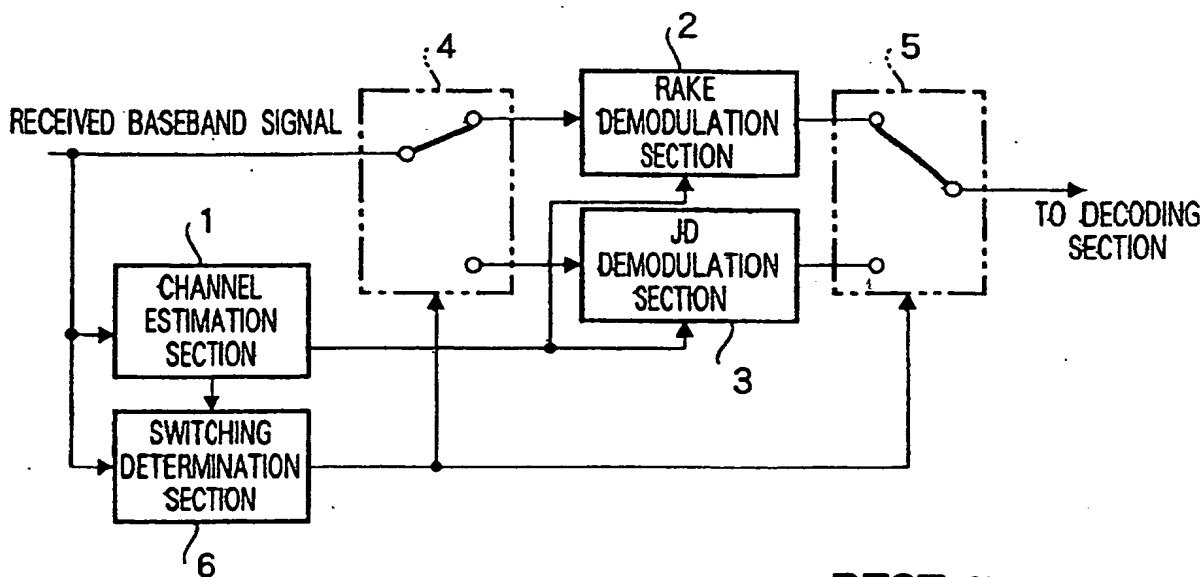


FIG. 1

BEST AVAILABLE COPY

Description

Technical Field

[0001] The present invention relates to a demodulation apparatus and demodulation method suitable for use in a CDMA (Code Division Multiple Access) mobile communication system.

Background Art

[0002] Conventionally, Joint Detection (hereinafter referred to as "JD") demodulation is used as a demodulation method in CDMA mobile communications. JD demodulation is a demodulation method that uses an interference cancellation equalization method that obtains a signal free of inter-code interference or effects of interference on other users. Specifically, a demodulated signal is obtained by performing computation that cancels inter-code interference and effects of interference on other users from a received signal by using a delay profile obtained by means of channel estimation and spreading codes for all users.

[0003] FIG.24 is a block diagram showing the schematic configuration of a conventional JD demodulation apparatus. A conventional JD demodulation apparatus is composed of a channel estimation section 50 and a JD demodulation section 51. The JD demodulation section 51 is composed of a cross-correlation matrix generation section 52 and an interference cancellation computation section 53.

[0004] The channel estimation section 50 performs channel estimation processing using a known signal sequence included in a received baseband signal, and generates a delay profile for all multiplex codes of all multiplex users. The cross-correlation matrix generation section 52 of the JD demodulation section 51 generates a cross-correlation matrix based on a delay profile generated by the channel estimation section 50 and spreading code information for all multiplex codes of all multiplexed users. Using the cross-correlation matrix generated by the cross-correlation matrix generation section 52 and the received baseband signal, the interference cancellation computation section 53 performs computation that cancels inter-code interference and effects of interference on other users. The above spreading code information can be obtained from a separately provided spreading code estimation section (not shown) or from a higher layer.

[0005] Information concerning conventional JD demodulation is given in, for example, "Interference Cancellation vs. Channel Equalization and Joint Detection for the Downlink of C/TDMA Mobile Radio Concepts" (Bernd Steiner, Proceedings of EPMCC Conference Germany 1997, No.145, pp.253-260) or "EFFICIENT MULTI-RATE MULTI-USER DETECTION FOR THE ASYNCHRONOUS WCDMA UPLINK" (H.R.Karimi, VTC'99, pp.593-597).

[0006] However, with a demodulation apparatus using conventional JD demodulation, while the performance of JD demodulation is good compared with normal RAKE demodulation, there are problems in that the amount of computation is large, and power consumption is high.

Disclosure of Invention

[0007] It is an object of the present invention to provide a demodulation apparatus and demodulation method that enable power-saving to be achieved while using JD demodulation.

[0008] This object is achieved by providing for switching between RAKE demodulation and JD demodulation to be performed in accordance with reception conditions, and using JD demodulation only when necessary.

Brief Description of Drawings

[0009]

FIG.1 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 1 of the present invention;

FIG.2 is a flowchart showing the operation of a demodulation apparatus according to Embodiment 1 of the present invention;

FIG.3 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 4 of the present invention;

FIG.4 is a flowchart showing the operation when a demodulation apparatus according to Embodiment 4 of the present invention is used in a mobile device;

FIG.5 is a flowchart showing the operation when a demodulation apparatus according to Embodiment 4 of the present invention is used in a base station;

FIG.6 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 5 of the present invention;

FIG.7 is a flowchart showing the operation of a demodulation apparatus according to Embodiment 5 of the present invention;

FIG.8 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 6 of the present invention;

FIG.9 is a flowchart showing the operation of a demodulation apparatus according to Embodiment 6 of the present invention;

FIG. 10 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 7 of the present invention;

FIG.11 is a flowchart showing the operation of a demodulation apparatus according to Embodiment 7 of the present invention;

FIG. 12 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 8 of the present invention;

FIG.13 is a block diagram showing the configuration of the joint detection demodulation section of a demodulation apparatus according to Embodiment 8 of the present invention;

FIG.14 is a flowchart showing the operation of a demodulation apparatus according to Embodiment 8 of the present invention;

FIG. 15 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 9 of the present invention;

FIG.16 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 10 of the present invention;

FIG.17 is a flowchart showing the operation of a demodulation apparatus according to Embodiment 10 of the present invention;

FIG.18 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 11 of the present invention;

FIG.19 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 12 of the present invention;

FIG.20 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 13 of the present invention;

FIG.21 is a flowchart showing the operation of a demodulation apparatus according to Embodiment 13 of the present invention;

FIG.22 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 14 of the present invention;

FIG.23 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 15 of the present invention; and

FIG.24 is a block diagram showing the configuration of a conventional demodulation apparatus.

Best Mode for Carrying out the Invention

[0010] With reference now to the accompanying drawings, embodiments of the present invention will be explained in detail below.

(Embodiment 1)

[0011] FIG.1 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 1 of the present invention.

[0012] In FIG. 1, a demodulation apparatus according to this embodiment comprises a channel estimation section 1, a RAKE demodulation section 2, a JD (joint detection) demodulation section 3, switches 4 and 5 that switch between the RAKE demodulation section 2 and JD demodulation section 3, and a switching determination section 6 that performs switching of switches 4 and 5 based on the number of spreading codes multiplexed in a received signal. The number of spreading codes corresponds to the reception conditions referred to in

claim 1.

[0013] The channel estimation section 1 performs channel estimation using a known signal sequence (for example, a midamble) included in a received signal, generates a delay profile for all users, and inputs this to the RAKE demodulation section 2, JD demodulation section 3, and switching determination section 6. The switching determination section 6 detects the number of spreading codes multiplexed in the received signal, and compares the detected number of spreading codes with a predetermined threshold value. If this comparison shows that the number of detected codes is less than the predetermined threshold value, switches 4 and 5 are switched to the RAKE demodulation section 2 side. If, on the other hand, the number of detected codes is greater than or equal to the predetermined threshold value, switches 4 and 5 are switched to the JD demodulation section 3 side.

[0014] As interference increases in accordance with the number of spreading codes multiplexed in a signal, although the use of JD demodulation results in a major improvement in performance, as the number of spreading codes decreases interference also decreases, and thus the effect of JD demodulation is reduced. In such a case, RAKE demodulation is effective. Either a value notified from a higher layer, or the number of spreading codes estimated in channel estimation, may be used as the number of spreading codes.

[0015] Next, the operation of a demodulation apparatus according to this embodiment will be described with reference to the flowchart shown in FIG.2.

[0016] First, the number of spreading codes multiplexed in the received signal is determined (Step 10). Then the determined number of spreading codes is compared with a predetermined threshold value (Step 12), and if this comparison shows that the number of spreading codes is less than the predetermined threshold value (that is, in the NO case), switches 4 and 5 are switched to the RAKE demodulation section 2 side and RAKE demodulation is selected (Step 14). If, on the other hand, the number of spreading codes is greater than or equal to the predetermined threshold value (that is, in the YES case), switches 4 and 5 are switched to the JD demodulation section 3 side and JD demodulation is selected (Step 16). The result of demodulation by means of the selected demodulation method is input to a decoding section (not shown).

[0017] Thus, according to a demodulation apparatus of this embodiment, switching between RAKE demodulation and JD demodulation is performed based on the number of spreading codes multiplexed in a received signal. That is to say, when the number of spreading codes is small and adequate reception quality can be obtained by means of RAKE demodulation, the system switches to the RAKE demodulation section 2, and when the number of spreading codes is large and adequate reception quality cannot be obtained by means of RAKE demodulation, the system switches to the JD de-

modulation section 3.

[0018] Therefore, power can be saved during demodulation by using JD demodulation, which incurs high power consumption, only when the number of spreading codes multiplexed in a received signal is large—that is to say, when there are a large number of users.

(Embodiment 2)

[0019] With the above-described demodulation apparatus according to Embodiment 1, the condition for switching between JD demodulation and RAKE demodulation is "the number of spreading codes multiplexed in a received signal", but with a demodulation apparatus according to this embodiment, the switching condition is "the number of transmission paths". The configuration of this apparatus is identical to that of the demodulation apparatus in FIG.1, and therefore FIG.1 will again be referred to.

[0020] The channel estimation section 1 determines the number of transmission paths at the time of channel estimation generation. The switching determination section 6 compares the number of transmission paths determined by the channel estimation section 1 with a predetermined threshold value, and if the number of transmission paths is less than the predetermined threshold value, the system switches to RAKE demodulation. If, on the other hand, the number of transmission paths is greater than or equal to the predetermined threshold value, the system switches to JD demodulation. Possible methods of setting the threshold value are to set the total number of paths for all users, or to set the number of paths on a user-by-user basis. If there are a large number of transmission paths, interference will be proportionally greater for one path, and so the performance improving effect of JD demodulation will be great. In contrast, as the number of transmission paths is decreased, the interference is decreased, and so the effect of JD is small. Therefore, if JD demodulation is used only when the number of transmission paths is large, power can be saved while maintaining reception quality. The number of transmission paths corresponds to the reception conditions referred to in claim 1.

[0021] Thus, according to a demodulation apparatus of this embodiment, switching between RAKE demodulation and JD demodulation is performed based on the number of transmission paths, and JD demodulation, which incurs high power consumption, is selected only when the number of transmission paths is large, thereby enabling power to be saved during demodulation.

(Embodiment 3)

[0022] With the above-described demodulation apparatus according to Embodiment 1, the condition for switching between JD demodulation and RAKE demodulation is "the number of spreading codes multiplexed in a received signal", and with the above-described de-

modulation apparatus according to Embodiment 2, the switching condition is "the number of transmission paths", but with a demodulation apparatus according to this embodiment, the two above-described conditions are used. The configuration of this apparatus is identical to that of the demodulation apparatus in FIG.1, and therefore FIG.1 will again be referred to.

[0023] The switching determination section 6 determines whether or not the condition that the result of multiplying together the number of spreading codes and number of paths detected by the channel estimation section 1 exceeds a predetermined threshold value is satisfied. If this condition is satisfied, the system switches to the JD demodulation section 3, and if this condition is not satisfied, the system switches to the RAKE demodulation section 2.

[0024] Thus, according to a demodulation apparatus of this embodiment, switching between RAKE demodulation and JD demodulation is performed based on the number of spreading codes multiplexed in a received signal and the number of transmission paths, and JD demodulation, which incurs high power consumption, is selected only when the result of multiplying together the number of spreading codes and the number of paths detected by the channel estimation section 1 is greater than or equal to a predetermined threshold value, thereby enabling power to be saved during demodulation.

(Embodiment 4)

[0025] FIG.3 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 4 of the present invention. Parts in FIG.3 identical to those in FIG.1 are assigned the same codes as in FIG.1.

[0026] As shown in FIG.3, a demodulation apparatus according to this embodiment has a configuration whereby the condition for switching between JD demodulation and RAKE demodulation is the SIR (signal to interference ratio) of RAKE demodulation results for a number of symbols, and the system switches to RAKE demodulation if that SIR is greater than or equal to a predetermined threshold value, and switches to JD demodulation if the SIR is less than the predetermined threshold value. The SIR is calculated by an SIR computation section 7. A switching determination section 8 performs switching between the RAKE demodulation section 2 and JD demodulation section 3 based on the computation result of the SIR computation section 7. In order to perform demodulation method switching determination based on an SIR, it is necessary to monitor the SIR constantly. Therefore, with a demodulation apparatus according to this embodiment, provision is made for the output of the channel estimation section 1 to be input constantly to the RAKE demodulation section 2 so that the SIR can be monitored even when the system switches to the JD demodulation section 3 side.

[0027] Switching between the RAKE demodulation

section 2 and JD demodulation section 3 is performed by means of a switch 5, a switch 9 located between the channel estimation section 1 and JD demodulation section 3, and a switch 10 located between the SIR computation section 7 and switch 5. When the RAKE demodulation section 2 is to be used, switch 5 is switched to the RAKE demodulation section 2 side, switch 9 is opened, and switch 10 is closed. When the JD demodulation section 3 is to be used, switch 5 is switched to the JD demodulation section 3 side, switch 9 is closed, and switch 10 is opened.

[0028] Demodulation method switching differs according to whether it is applied to a mobile device or to a base station. Operation in the case of application to a mobile device is shown in the flowchart in FIG. 4, and operation in the case of application to a base station is shown in the flowchart in FIG. 5.

[When applied to a mobile device]

[0029] As shown in the flowchart in FIG. 4, a delay profile is generated and then processing for switching determination (SIR measurement, etc.) is performed (Step 20, Step 22). After processing for switching determination has been performed, the SIR is compared with a predetermined threshold value (Step 24). If this comparison shows that the SIR is greater than or equal to the predetermined threshold value (that is, in the NO case), a signal that switches switch 5 to the RAKE demodulation section 2 side is output, and signals that open switch 9 and close switch 10 are output, thereby selecting RAKE demodulation (Step 26). If, on the other hand, the SIR is less than the predetermined threshold value (that is, in the YES case), a signal that switches switch 5 to the JD demodulation section 3 side is output, and signals that close switch 9 and open switch 10 are output, thereby selecting JD demodulation (Steps 28 and 30). In JD demodulation, JD demodulation is performed after performing RAKE demodulation for all users.

[0030] In the case of application to a mobile device, RAKE demodulation need only be performed for that device, but with JD demodulation, it is necessary for RAKE demodulation to be performed for all users before this JD demodulation is carried out. That is to say, since JD demodulation is performed when the SIR is less than the predetermined threshold value, the JD demodulation section 3 carries out RAKE demodulation for all users. On the other hand, since RAKE demodulation is performed when the SIR is greater than or equal to the predetermined threshold value, the RAKE demodulation section 2 carries out RAKE demodulation for the user of that device. The result of demodulation by means of the selected demodulation method is input to a decoding section (not shown).

[When applied to a base station]

[0031] In a base station, RAKE demodulation is per-

formed for all operational mobile devices within the cell, and therefore when an SIR is less than a predetermined threshold value, JD demodulation is carried out directly.

[0032] As shown in the flowchart in FIG. 5, a delay profile is generated, and then processing for switching determination is performed and SIR measurement is performed (Step 40, Step 42). After SIR measurement has been performed, RAKE demodulation is carried out for all users (Step 44). Then the SIR is compared with a predetermined threshold value (Step 46). If this comparison shows that the SIR is greater than or equal to the predetermined threshold value (that is, in the NO case), this processing is terminated directly. If, on the other hand, the SIR is less than the predetermined threshold value (that is, in the YES case), a signal that switches switch 5 to the JD demodulation section 3 side is output, and signals that close switch 9 and open switch 10 are output, thereby selecting JD demodulation (Step 48).

[0033] Thus, in the case of RAKE demodulation, in a mobile device RAKE demodulation is performed for that user signal, whereas in a base station RAKE demodulation is performed for all user signals. In the case of JD demodulation, on the other hand, in RAKE demodulation, RAKE demodulation is performed for all users both in a mobile device and in a base station. The JD demodulation section 3 performs computation that cancels inter-code interference and effects of interference on other users, using a delay profile, RAKE demodulation results, and the spreading codes of all users. The SIR corresponds to the reception conditions referred to in claim 1.

[0034] Thus, according to a demodulation apparatus of this embodiment, switching between RAKE demodulation and JD demodulation is performed based on the SIR of RAKE demodulation results for a number of symbols, and JD demodulation, which incurs high power consumption, is used only when the SIR is less than a predetermined threshold value, thereby enabling power to be saved during demodulation.

(Embodiment 5)

[0035] FIG. 6 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 5 of the present invention, and FIG. 7 is a flowchart showing the operation of a demodulation apparatus according to this embodiment. Parts in FIG. 6 identical to those in FIG. 1 are assigned the same codes as in FIG. 1.

[0036] A demodulation apparatus according to this embodiment has a configuration whereby, in communications in which retransmission control is performed by means of the Automatic Repeat Request (ARQ) method, the condition for switching between JD demodulation and RAKE demodulation is "the number of ARQ retransmissions", and the system switches to RAKE demodulation if that number of retransmission times is less than a predetermined threshold value, and switches to

JD demodulation if that number of retransmission times is greater than or equal to the predetermined threshold value. The number of retransmission times can be found by detecting errors in decoded bits output from a decoding section 13 with an error detection section 14 and counting these errors with a counter section 15. A switching determination section 12 performs demodulation method switching based on the number of retransmission times. For example, it may be that RAKE demodulation is selected initially to suppress power consumption, and when reception quality does not meet a reference level and retransmission is performed, the system switches to JD demodulation if the number of retransmission times is greater than or equal to a predetermined threshold value. The number of ARQ retransmissions corresponds to the reception conditions referred to in claim 1.

[0037] FIG.7 is a flowchart showing the operation of a demodulation apparatus according to this embodiment.

[0038] In this flowchart, processing is first performed for the purpose of switching determination, and measurement of the number of retransmission times is carried out (Step 50). After the number of retransmission times has been measured, the measured number of retransmission times is compared with a predetermined threshold value (Step 52). If this comparison shows that the number of retransmission times is less than the predetermined threshold value (that is, in the NO case), RAKE demodulation is selected by switching switches 4 and 5 to the RAKE demodulation section 2 side (Step 54). If, on the other hand, the number of retransmission times is greater than or equal to the predetermined threshold value (that is, in the YES case), JD demodulation is selected by switching switches 4 and 5 to the JD demodulation section 3 side (Step 56).

[0039] Thus, according to a demodulation apparatus of this embodiment, switching between RAKE demodulation and JD demodulation is performed based on the number of ARQ retransmissions, and JD demodulation, which incurs high power consumption, is used only when that number of retransmission times is greater than or equal to a predetermined threshold value, thereby enabling power to be saved during demodulation. The number of retransmission times may also be determined using a value notified by a higher layer.

(Embodiment 6)

[0040] FIG.8 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 6 of the present invention. Parts in FIG.8 identical to those in FIG.6 are assigned the same codes as in FIG.6.

[0041] A demodulation apparatus according to this embodiment has a configuration whereby the threshold value used for JD demodulation / RAKE demodulation switching determination is changed in accordance with

errors in decoded bits. Decoded bit errors are detected by the error detection section 14.

[0042] FIG.9 is a flowchart showing the operation of a demodulation apparatus according to this embodiment.

[0043] In this flowchart, processing is first performed for the purpose of switching determination, and the number of spreading codes multiplexed in a received signal is detected (Step 60). After detection of the number of spreading codes, the detected number of spreading codes is compared with a predetermined threshold value (Step 62). If this comparison shows that the number of spreading codes is less than the predetermined threshold value, switches 4 and 5 are switched to the RAKE demodulation section 2 side and RAKE demodulation is performed (Step 64). Then, after RAKE demodulation, error correction decoding is carried out (Step 66), followed by error detection processing (Step 68). If a decoded bit error is detected by the error detection section 14, that result is input to a switching determination section 17. When the error detection result is input from the error detection section 14, the switching determination section 17 uses that result to control the threshold value that is the criterion for demodulation method switching. For example, if an error is detected even though a switch has been made to the RAKE demodulation section 2 with the current threshold value, the current threshold value is determined not to be appropriate for the current reception conditions, and is decremented by a predetermined value. For example, a threshold value of "40" will be changed to "35". The switching determination section 17 carries out this processing repeatedly until errors are no longer detected. Then, when errors are no longer detected, the current threshold value is incremented successively by a predetermined value after the elapse of a predetermined interval from that point in time, or after switching determination processing has been performed a predetermined number of times since the point in time at which errors ceased to be detected. This processing is carried out until the value immediately prior to detection of an error.

[0044] If, on the other hand, it is determined in Step 62 that the number of spreading codes is greater than or equal to the predetermined threshold value, switches 4 and 5 are switched to the JD demodulation section 3 side and JD demodulation is performed (Step 70). After JD demodulation, error correction decoding is performed (Step 72), and this processing is terminated.

[0045] Thus, according to a demodulation apparatus of this embodiment, the threshold value that is the criterion for demodulation method switching is changed in accordance with errors in decoded bits, thus enabling a fixed reception quality to be constantly maintained.

[0046] In this embodiment, switching determination is performed based on the number of spreading codes, but switching determination may also be determined based on the number of transmission paths, a calculated SIR

value, or the number of ARQ retransmissions.

(Embodiment 7)

[0047] FIG. 10 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 7 of the present invention. Parts in FIG. 10 identical to those in FIG. 3 are assigned the same codes as in FIG. 3.

[0048] A demodulation apparatus according to this embodiment is provided with a storage section 19 that stores post-RAKE-demodulation symbol information, and if an error is detected during RAKE demodulation, this post-RAKE-demodulation symbol information stored in the storage section 19 is used for interference cancellation computation in the JD demodulation section 3.

[0049] A switching determination section 17 detects the number of spreading codes multiplexed in a received signal. Then the system switches to the RAKE demodulation section 2 if the detected number of spreading codes is less than a predetermined threshold value, or switches to the JD demodulation section 3 if the detected number of spreading codes is greater than or equal to the predetermined threshold value. After a switch is made to the RAKE demodulation section 2 when the detected number of spreading codes is less than the predetermined threshold value, if a decoded bit error is detected by an error detection section 14, that result is input to the switching determination section 17. When the error detection result is input from the error detection section 14, the switching determination section 17 controls switches 5, 9, and 10 to switch from the RAKE demodulation section 2 to the JD demodulation section 3. The error detection result from the error detection section 14 is also input to the storage section 19, and RAKE demodulated symbol information stored in the storage section 19 is read and input to the JD demodulation section 3. The JD demodulation section 3 performs interference cancellation computation based on the post-RAKE-demodulation symbol information from the storage section 19 and a delay profile from the channel estimation section 1, and inputs the result to a decoding section 13. Part of the computation in JD demodulation can be omitted by using post-RAKE-demodulation symbols in JD demodulation. By this means, power can be saved in demodulation.

[0050] FIG. 11 is a flowchart showing the operation of a demodulation apparatus according to this embodiment.

[0051] In this flowchart, processing is first performed for the purpose of switching determination, and the number of spreading codes multiplexed in a received signal is detected (Step 80). After detection of the number of spreading codes, the detected number of spreading codes is compared with a predetermined threshold value (Step 82). If this comparison shows that the number of spreading codes is less than the pre-

terminated threshold value, the system switches to the RAKE demodulation section 2 (Step 84). If, on the other hand, the number of spreading codes is greater than or equal to the predetermined threshold value, the system switches to the JD demodulation section 3 (Step 92).

[0052] After RAKE demodulation has been performed following switching to the RAKE demodulation section 2 when the number of spreading codes is less than the predetermined threshold value, error correction decoding is performed (Step 86). After error correction decoding has been performed, error detection processing is carried out (Step 88). In this error detection processing, the presence or absence of an error is determined (Step 90); if there is no error this processing is terminated, and if there is an error the system switches to the JD demodulation section 3 (Step 92). After the switch is made to the JD demodulation section 3 and JD demodulation has been performed, error correction decoding is carried out (Step 94). After error correction decoding has been carried out, this processing is terminated.

[0053] Thus, according to a demodulation apparatus of this embodiment, when there is an error in a RAKE demodulation result, JD demodulation is performed using RAKE demodulation result symbol information for the point in time at which that error occurred, thereby making it possible to keep error occurrence at a low level, and enabling reception quality to be improved. Also, since a switch is made to JD demodulation when there is an error in a RAKE demodulation result, power saving is achieved by setting a high threshold value so that RAKE demodulation, which requires low power consumption, is used as much as possible.

[0054] Moreover, since computation for performing RAKE demodulation processing in the JD demodulation section 3 can be omitted, the amount of processing involved in JD demodulation can be reduced. From the hardware standpoint, by making the RAKE demodulation section of the JD demodulation section 3 the RAKE demodulation section 2, it is possible to reduce the amount of processing involved in JD demodulation, and also to reduce costs.

[0055] Not only in this embodiment, but in all the above-described embodiments, using RAKE demodulated symbol information in JD demodulation enables the omission of computation corresponding to RAKE demodulation processing in the JD demodulation section 3. This makes it possible to reduce the amount of processing and storage apparatus capacity required for JD demodulation.

[0056] Furthermore, in the above-described embodiments, descriptions have covered RAKE demodulation and JD demodulation, but for RAKE demodulation, a demodulation method may be used whereby coherent detection or differentially coherent detection is performed after despreading, and for JD demodulation, another demodulation method that has an interference cancellation function may be used. Moreover, application is also possible with regard to Channel Equalization that can-

cels only the effects of multi-path interference. Information concerning this Channel Equalization is given in, for example, "Interference Cancellation vs. Channel Equalization and Joint Detection for the Downlink of C/TDMA Mobile Radio Concepts" (Bernd Steiner, Proceedings of EPMCC Conference Germany 1997, No.145, pp. 253-260).

(Embodiment 8)

[0057] FIG.12 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 8 of the present invention, and FIG.13 is a block diagram showing the configuration of the JD demodulation section 3 that is a component part of a demodulation apparatus according to this embodiment. Parts in FIG.12 identical to those in FIG.1 are assigned the same codes as in FIG. 1 and their explanations are omitted.

[0058] In FIG.12, a demodulation apparatus according to this embodiment comprises a channel estimation section 1, a JD demodulation section 3, and a delay profile comparison processing section 20. As shown in FIG. 13, the JD demodulation section 3 is composed of a cross-correlation matrix generation section 21 and interference cancellation computation section 22. The channel estimation section 1 performs channel estimation using a known signal sequence included in a received signal, generates a delay profile for all users, and inputs this to the delay profile comparison processing section 20 and JD demodulation section 3. The delay profile comparison processing section 20 determines whether or not a cross-correlation matrix is to be generated based on the amount of change of the current delay profile with respect to the previous delay profile. That is to say, after obtaining the amount of change of the current delay profile with respect to the previous delay profile, the obtained amount of change is compared with a predetermined threshold value, and a selection result is output indicating that the previous cross-correlation matrix is to be used if the amount of change is less than the threshold value, or that a new cross-correlation matrix is to be generated if the amount of change greater than or equal to the threshold value. This selection result is input to the JD demodulation section 3. The delay profile comparison processing section 20 has a storage section (not shown) that stores the delay profile obtained this time for processing in the next received transmission unit.

[0059] The cross-correlation matrix generation section 21 of the JD demodulation section 3 carries out generation of a new cross-correlation matrix if the selection result is that a newly generated cross-correlation matrix is to be used, and does not carry out generation of a new cross-correlation matrix if the selection result is that the previously generated cross-correlation matrix is to be used. Also, if the selection result is that a new cross-correlation matrix is also to be used by the interference

cancellation computation section 22 of the JD demodulation section 3, JD demodulation is performed using the cross-correlation matrix newly generated this time. If, on the other hand, the selection result is that the previously generated cross-correlation matrix is to be used, JD demodulation is performed using the previously generated cross-correlation matrix. The interference cancellation computation section 22 has a storage section (not shown) that stores the cross-correlation matrix used this time for use in demodulation next time. The result of demodulation by the JD demodulation section 3 is input to a decoding section (not shown).

[0060] FIG.14 is a flowchart showing the operation of a demodulation apparatus according to this embodiment.

[0061] In this flowchart, first, channel estimation is performed and a delay profile is generated (Step 100). Next, the delay profile newly generated this time is compared with the stored previous delay profile, and the amount of change is calculated (Step 102). Then, after the amount of change has been calculated, this amount of change is compared with a predetermined threshold value, and it is determined whether or not a cross-correlation matrix is to be generated (Step 104). If this comparison shows that it is not necessary to generate a cross-correlation matrix (the NO case)-that is to say, if the amount of change of the delay profile is less than the threshold value-the previous cross-correlation matrix is read from the storage section (not shown) and interference cancellation computation is performed (Step 108). If, on the other hand, it is necessary to generate a new cross-correlation matrix (the YES case)-that is to say, if the amount of change of the delay profile is greater than or equal to the threshold value-a new cross-correlation matrix is generated (Step 106). After the new cross-correlation matrix has been generated, it is stored and is also used in interference cancellation computation (Step 108).

[0062] Thus, according to a demodulation apparatus of this embodiment, when a previously generated cross-correlation matrix can be employed as the cross-correlation matrix used in JD demodulation, that cross-correlation matrix is used and a new cross-correlation matrix is not generated, thereby enabling power to be saved during demodulation.

(Embodiment 9)

[0063] FIG.15 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 9 of the present invention. Parts in FIG.15 identical to those in FIG.12 are assigned the same codes as in FIG.12 and their explanations are omitted.

[0064] A demodulation apparatus according to this embodiment comprises a channel estimation section 1, a JD demodulation section 3, a delay profile averaging processing section 23, and a buffer 24. The delay profile averaging processing section 23 averages delay pro-

files over one or a plurality of transmission units and outputs the result to the JD demodulation section 3. The buffer 24 holds the received baseband signal obtained while the delay profile averaging processing section 23 is performing delay profile averaging processing. The JD demodulation section 3 generates a cross-correlation matrix to be used in JD demodulation from the input average delay profile, and performs JD demodulation processing on the received baseband signal for the averaging period. The result of JD demodulation is input to a decoding section (not shown).

[0065] Thus, according to a demodulation apparatus of this embodiment, delay profiles over one or a plurality of transmission units are averaged and the result is input to the JD demodulation section 3, and the received baseband signal during the delay profile averaging processing period is held in a buffer 24 and is input to the JD demodulation section 3 after delay profile averaging processing, thereby making possible JD demodulation that uses an averaged delay profile, and so making it possible to reduce the number of times of generation of a cross-correlation matrix, and enabling power to be saved during demodulation.

(Embodiment 10)

[0066] FIG. 16 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 10 of the present invention. Parts in FIG.16 identical to those in FIG.1 and FIG.15 are assigned the same codes as in FIG.1 and FIG.15.

[0067] In the above-described demodulation apparatus according to Embodiment 9, a large-capacity buffer 24 is necessary due to the fact that a chip-rate or sample-rate received baseband signal is stored. In a demodulation apparatus according to this embodiment, a RAKE demodulation section 2 is added and RAKE demodulation processing is carried out for all users in the JD demodulation process, so that a buffer of small memory capacity can be used. As a result, only RAKE demodulated symbols need be stored in the buffer 24, and it is possible to use a buffer of small memory capacity.

[0068] FIG.17 is a flowchart showing the operation of a demodulation apparatus according to this embodiment.

[0069] In this flowchart, first, channel estimation is performed and a delay profile is generated (Step 120), and then RAKE demodulation is performed (Step 122). Next, delay profiles over one or a plurality of transmission units are averaged (Step 124). Then JD demodulation is performed using the averaged delay profile and the RAKE demodulation result (Step 126).

[0070] Thus, according to a demodulation apparatus of this embodiment, a received baseband signal is RAKE demodulated over a delay profile averaging processing period and RAKE demodulated symbols thus obtained are stored, thereby making it possible to reduce memory capacity and to use a low-cost buffer of

small memory capacity.

(Embodiment 11)

[0071] FIG. 18 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 11 of the present invention. Parts in FIG.18 identical to those in FIG.1, FIG.12, and FIG.15 are assigned the same codes as in FIG.1, FIG.12, and FIG.15.

[0072] In a demodulation apparatus according to this embodiment, a delay profile comparison processing section 20 is provided in addition to the configuration of the above-described demodulation apparatus according to Embodiment 10. This delay profile comparison processing section 20 calculates the amount of change of the current delay profile with respect to the delay profile at the start of averaging, and determines whether or not that amount of change is greater than or equal to a predetermined threshold value. The delay profile averaging processing section 23 determines the delay profile averaging period in accordance with the result of delay profile comparison processing section 20 processing. In this case, processing is performed so that averaging is discontinued if the amount of change of the delay profile is greater than or equal to the threshold value, and averaging is continued if the amount of change of the delay profile is less than the threshold value. If the result of processing by the delay profile comparison processing section 20 is that averaging is to be discontinued, the JD demodulation section 3 reads the RAKE demodulation section 2 demodulation result from the buffer 24 and performs JD demodulation. The result of JD demodulation is input to a decoding section (not shown). The reason for controlling the averaging period in accordance with the amount of change of the delay profile is that, if the averaging period is extended regardless of the fact that the amount of change of the delay profile has increased, the error between the actual value and the averaged value will be large and quality will degrade. When the amount of change of the delay profile is large, a cross-correlation matrix is generated using a shorter averaging period.

[0073] Thus, according to a demodulation apparatus of this embodiment, the averaging period is controlled in accordance with the amount of change of the delay profile, thereby making it possible to prevent degradation of reception quality.

(Embodiment 12)

[0074] FIG.19 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 12 of the present invention. Parts in FIG.19 identical to those in FIG.1, FIG.12, and FIG.15 are assigned the same codes as in FIG.1, FIG.12, and FIG.15.

[0075] In a demodulation apparatus according to this embodiment, the delay profile comparison processing section 20 shown in the above-described demodulation

apparatus according to Embodiment 11 is provided after the delay profile averaging processing section 23 shown in that demodulation apparatus according to Embodiment 11. The delay profile comparison processing section 20 calculates the amount of change of the current average delay profile with respect to the previous average delay profile, and performs selection processing for the cross-correlation matrix to be used in JD demodulation based on that amount of change. That is to say, a selection result is input to the JD demodulation section 3 such that the previous cross-correlation matrix is used when the amount of change is less than a predetermined threshold value, and a cross-correlation matrix is newly generated from the current average delay profile when the amount of change is greater than or equal to the predetermined threshold value.

[0076] The JD demodulation section 3 performs processing for generating a cross-correlation matrix from the current delay profile or using the previous cross-correlation matrix in accordance with the selection result from the delay profile comparison processing section 20, and performs JD demodulation for RAKE demodulated symbols of the current averaging period. The result of JD demodulation is input to a decoding section (not shown).

[0077] Thus, according to a demodulation apparatus of this embodiment, a cross-correlation matrix is reused in accordance with the amount of change of the averaged delay profile, making generation of a new cross-correlation matrix unnecessary to that extent, and thus enabling power to be saved during demodulation.

(Embodiment 13)

[0078] FIG.20 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 13 of the present invention. Parts in FIG.20 identical to those in FIG.10 and FIG.12 are assigned the same codes as in FIG.10 and FIG.12.

[0079] In a demodulation apparatus according to this embodiment, a decoding section 13 that decodes the JD demodulation section 3 demodulation result, and an error detection section (corresponding to the detecting means and threshold value controlling means in claim 19) 14 that detects decoded bit errors and inputs the result to the delay profile comparison processing section 20 are provided in addition to the configuration of the above-described demodulation apparatus according to Embodiment 8.

[0080] The demodulation result from the JD demodulation section 3 is input to the decoding section 13, and decoded bits are output. These decoded bits are input to the error detection section 14, where error detection is performed. If the error detection section 14 detects an error in decoded bits, it performs control that changes the threshold value in the delay profile comparison processing section 20. In this case, threshold value change control is performed until errors are no longer

detected in decoded bits. When the threshold value is changed, a situation in which the threshold value is lost track of can be prevented by returning to the initial value, or returning to the pre-change value, following the elapse of a predetermined period after errors are no longer detected in decoded bits.

[0081] FIG.21 is a flowchart showing the operation of a demodulation apparatus according to this embodiment.

[0082] In this flowchart, first, channel estimation is performed and a delay profile is generated (Step 130). Next, the delay profile newly generated this time is compared with the stored previous delay profile, and the amount of change is calculated (Step 132). Then the calculated amount of change is compared with a predetermined threshold value, and based on the result it is determined whether or not a cross-correlation matrix is to be generated (Step 134). If it is determined that it is not necessary to generate a cross-correlation matrix (the NO case)-that is to say, if the amount of change of the delay profile is less than the predetermined threshold value-the previous cross-correlation matrix is read from the storage section (not shown) and interference cancellation computation is performed (Step 138). If, on the other hand, it is necessary to generate a new cross-correlation matrix (the YES case)-that is to say, if the amount of change of the delay profile is greater than or equal to the predetermined threshold value-a new cross-correlation matrix is generated (Step 136). When a cross-correlation matrix has been newly generated, it is stored in the storage section (not shown) and is also used in interference cancellation computation (Step 138). After interference cancellation computation has been performed, decoding processing is carried out (Step 140). After the decoding processing, error detection processing is performed (Step 142). If an error is detected in a decoded bit in this error detection processing, control is performed that changes the threshold value in delay profile comparison processing (Step 132). This control is performed until errors are no longer detected.

[0083] Thus, according to a demodulation apparatus of this embodiment, the threshold value used in delay profile comparison processing is changed in accordance with error detection results, enabling decoded bit errors to be reduced and reception quality to be improved.

(Embodiment 14)

[0084] FIG.22 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 14 of the present invention. Parts in FIG.22 identical to those in FIG.10 and FIG.18 are assigned the same codes as in FIG.10 and FIG.18.

[0085] A demodulation apparatus according to this embodiment is an application example of the above-described demodulation apparatus according to Embodi-

ment 11, and has an error detection section 14 in addition to the configuration of the demodulation apparatus according to Embodiment 11.

[0086] The delay profile comparison processing section 20 calculates the amount of change of the current delay profile with respect to the delay profile at the start of averaging, and performs processing so that averaging is discontinued if the calculated amount of change is greater than or equal to a predetermined threshold value, and averaging is continued if the calculated amount of change is less than the predetermined threshold value. If the error detection section 14 detects an error in decoded bits from the decoding section 13, it performs control that changes the threshold value in the delay profile comparison processing section 20. This control is performed until errors are no longer detected. When the threshold value is changed, a situation in which the threshold value is lost track of can be prevented by returning to the initial value, or returning to the pre-change value, following the elapse of a predetermined period after errors are no longer detected.

[0087] Thus, according to a demodulation apparatus of this embodiment, the threshold value used in delay profile comparison processing is changed in accordance with error detection results, enabling decoded bit errors to be reduced and reception quality to be improved.

(Embodiment 15)

[0088] FIG.23 is a block diagram showing the configuration of a demodulation apparatus according to Embodiment 15 of the present invention. Parts in FIG.23 identical to those in FIG.11 and FIG.18 are assigned the same codes as in FIG.11 and FIG.18.

[0089] A demodulation apparatus according to this embodiment is an application example of the above-described demodulation apparatus according to Embodiment 12, and has an error detection section 14 in addition to the configuration of the demodulation apparatus according to Embodiment 12. The delay profile comparison processing section 20 calculates the amount of change of the current average delay profile with respect to the previous average delay profile, and performs selection processing for the cross-correlation matrix to be used in JD demodulation based on the calculated amount of change. That is to say, a selection result is input to the JD demodulation section 3 such that the previous cross-correlation matrix is used when the amount of change is less than a threshold value, and a new cross-correlation matrix is generated from the current average delay profile when the amount of change is greater than or equal to the threshold value. If the error detection section 14 detects an error in decoded bits from the decoding section 13, it performs control that changes the threshold value in the delay profile comparison processing section 20. This control is performed until errors are no longer detected. When the threshold

value is changed, a situation in which the threshold value is lost track of can be prevented by returning to the initial value, or returning to the pre-change value, following the elapse of a predetermined period after errors are no longer detected.

[0090] Thus, according to a demodulation apparatus of this embodiment, the threshold value used in delay profile comparison processing is changed in accordance with error detection results, enabling decoded bit errors to be reduced and reception quality to be improved.

[0091] In the above embodiments, when a cross-correlation matrix is not newly generated the cross-correlation matrix generated on the previous occasion is used, but it is not absolutely necessary for the cross-correlation matrix generated on the previous occasion to be used, and the cross-correlation matrix generated on the occasion before last, for example, may be used instead. The key point is that if a cross-correlation matrix generated in the past can be used, it should be used.

[0092] As described above, according to the present invention, switching is performed between RAKE demodulation and JD demodulation in accordance with reception conditions, thereby making it possible to provide a demodulation apparatus with lower power consumption than a conventional demodulation apparatus that uses only JD demodulation.

[0093] Moreover, according to the present invention, the number of times of generation of a cross-correlation matrix used in JD demodulation can be reduced, enabling power to be saved during demodulation.

[0094] This application is based on Japanese Patent Application No.2000-300148 and Japanese Patent Application No.2000-300790 filed on September 29, 2000, entire contents of which are expressly incorporated by reference herein.

Industrial Applicability

[0095] The present invention is suitable for use in a CDMA mobile communication system.

Claims

1. A demodulation apparatus comprising:

first demodulating means for performing demodulation by means of joint detection;
second demodulating means for performing demodulation by means of RAKE;
switching means for switching between said first demodulating means and said second demodulating means; and
switching determining means for determining reception conditions and controlling said switching means based on that result so as to switch to either said first demodulating means

or said second demodulating means.

2. The demodulation apparatus according to claim 1, wherein said first demodulating means performs joint detection demodulation using symbols after RAKE demodulation. 5
3. The demodulation apparatus according to claim 1 or claim 2, further comprising code quantity detecting means for detecting a number of spreading codes multiplexed in a received signal; 10
 wherein said switching determining means switches to said second demodulating means when a number of spreading codes detected by said code quantity detecting means is less than a predetermined threshold value, and switches to said first demodulating means when a number of spreading codes detected by said code quantity detecting means is greater than or equal to a predetermined threshold value. 15 20
4. The demodulation apparatus according to claim 1 or claim 2, further comprising path quantity detecting means for detecting a number of transmission paths; 25
 wherein said switching determining means switches to said second demodulating means when a number of paths detected by said path quantity detecting means is less than a predetermined threshold value, and switches to said first demodulating means when a number of paths detected by said path quantity detecting means is greater than or equal to a predetermined threshold value. 30
5. The demodulation apparatus according to claim 1 or claim 2, further comprising: 35
 code quantity detecting means for detecting a number of spreading codes multiplexed in a received signal; and 40
 path quantity detecting means for detecting a number of transmission paths;
 wherein said switching determining means switches to said second demodulating means when a value obtained by multiplying together a number of spreading codes detected by said code quantity detecting means and a number of paths detected by said path quantity detecting means is greater than or equal to a predetermined threshold value, and switches to said first demodulating means when said predetermined condition is not satisfied. 45 50
6. The demodulation apparatus according to claim 1 or claim 2, further comprising SIR calculating means for calculating a signal to interference ratio in some or all symbol RAKE demodulation results; 55
 wherein said switching determining means

switches to said second demodulating means when a signal to interference ratio calculated by said SIR calculating means is greater than or equal to a predetermined threshold value, and switches to said first demodulating means when a signal to interference ratio calculated by said SIR calculating means is less than a predetermined threshold value.

7. The demodulation apparatus according to claim 1 or claim 2, 10
 wherein said switching determining means switches to said second demodulating means when a number of retransmission times by said automatic repeat requesting means is less than a predetermined threshold value, and switches to said first demodulating means when a number of retransmission times by said automatic repeat requesting means is greater than or equal to a predetermined threshold value. 15 20
8. The demodulation apparatus according to any one of claim 1 through claim 7, further comprising error detecting means; 25
 wherein a threshold value that is a criterion used in determination of switching between said first demodulating means and said second demodulating means is changed in accordance with an error detection result detected by said error detecting means. 30
9. The demodulation apparatus according to any one of claim 1 through claim 7, further comprising: 35
 error detecting means for detecting demodulation result errors; and
 storing means for storing RAKE demodulation results;
 wherein said switching determining means, by switching from said first demodulating means to said second demodulating means, when an error is detected in that demodulation result by said error detecting means, switches to said first demodulating means and also inputs to said first demodulating means a RAKE demodulation result stored in said storing means. 40 45
10. A demodulation apparatus comprising: 50
 cross-correlation matrix determining means for determining whether a cross-correlation matrix used in joint detection demodulation is to be newly generated in accordance with a predetermined threshold value for each received transmission unit or a cross-correlation matrix generated in the past is to be used; 55
 storing means for storing said cross-correlation matrix; and

joint detection demodulating means for, when new generation of a cross-correlation matrix is determined by said cross-correlation matrix determining means, newly generating a cross-correlation matrix in the current received transmission unit, using that cross-correlation matrix in joint detection demodulation, and also storing that cross-correlation matrix in said storing means, and, when use of a cross-correlation matrix generated in the past is determined by said cross-correlation matrix determining means, using a past cross-correlation matrix stored in said storing means in joint detection demodulation.

11. The demodulation apparatus according to claim 10, wherein said cross-correlation matrix determining means measures a delay profile change amount among a plurality of transmission units, determines use of a cross-correlation matrix generated for a past received transmission unit when an amount of change of a delay profile of a current received transmission unit with respect to a delay profile of a past received transmission unit is less than a predetermined threshold value, and determines use of a cross-correlation matrix generated for a current received transmission unit when an amount of change of a delay profile of a current received transmission unit with respect to a delay profile of a past received transmission unit is greater than or equal to a predetermined threshold value.

12. The demodulation apparatus according to claim 10 or claim 11, further comprising:

error detecting means for detecting an error in a decoded signal after joint detection demodulation; and
threshold value controlling means for changing a threshold value based on an error detection result from said error detecting means.

13. A demodulation apparatus comprising:

delay profile averaging processing means for averaging delay profiles among a plurality of transmission units;
delay profile comparison processing means for measuring an amount of change of delay profiles averaged by said delay profile averaging processing means, and comparing a measured amount of change with a predetermined threshold value; and
joint detection demodulating means for performing joint detection demodulation using a cross-correlation matrix generated for a past received transmission unit when an amount of change of a current delay profile average value

with respect to a past delay profile average value is less than said threshold value, and performing joint detection demodulation after newly generating a cross-correlation matrix from a current delay profile when said amount of change is greater than or equal to said threshold value.

14. The demodulation apparatus according to claim 13, further comprising:

error detecting means for detecting an error in a decoded signal after joint detection demodulation; and
threshold value controlling means for changing a delay profile averaging length or threshold value based on an error detection result from said error detecting means.

15. A demodulation apparatus comprising:

delay profile averaging processing means for averaging delay profiles among a plurality of transmission units; and
joint detection demodulating means for performing demodulation by means of joint detection using an average value of said delay profiles.

16. The demodulation apparatus according to claim 15, further comprising storing means for storing a received baseband signal during delay profile averaging processing by said delay profile averaging processing means and supplying said received baseband signal stored after said delay profile averaging processing has been performed to said joint detection demodulating means.

17. The demodulation apparatus according to claim 16, further comprising RAKE demodulating means for performing RAKE demodulation of a received baseband signal and supplying RAKE demodulated symbols obtained thereby to said storing means.

18. The demodulation apparatus according to any one of claim 15 through claim 17, further comprising delay profile comparison processing means for measuring a delay profile change amount among a plurality of transmission units, and performing determination to discontinue delay profile averaging when said delay profile change amount is greater than or equal to a predetermined threshold value and to continue averaging when said delay profile change amount is less than said threshold value;

wherein said joint detection demodulating means, when a determination result of said delay profile comparison processing means is discontinuation of averaging, performs joint detection de-

modulation on a received signal of a transmission unit for which averaging was performed using a delay profile average value.

19. The demodulation apparatus according to claim 18, further comprising: 5

error detecting means for detecting an error in a decoded signal after joint detection demodulation; and 10
threshold value controlling means for changing a threshold value for discontinuing delay profile averaging based on an error detection result from said error detecting means. 15

20. A radio base station apparatus comprising the demodulation apparatus according to any one of claim 1 through claim 19.

21. A radio communication terminal apparatus comprising the demodulation apparatus according to any one of claim 1 through claim 19. 20

22. A demodulation method comprising the steps of: 25

determining reception conditions;
selecting either demodulation by means of joint detection or demodulation by means of RAKE based on that determination result; and
performing demodulation on a received signal using the selected demodulation method. 30

23. A demodulation method wherein, when demodulation by means of RAKE is performed, demodulation by means of joint detection is performed on that demodulation result if there is an error. 35

24. A demodulation method comprising the steps of:

selecting a cross-correlation matrix to be used in joint detection demodulation in accordance with a predetermined threshold value; and
performing joint detection demodulation using the selected cross-correlation matrix. 40
45

25. A demodulation method comprising the steps of:

averaging delay profiles within a plurality of transmission units;
generating a cross-correlation matrix to be used in joint detection demodulation using said averaged delay profiles; and
performing joint detection demodulation using the generated cross-correlation matrix. 50
55

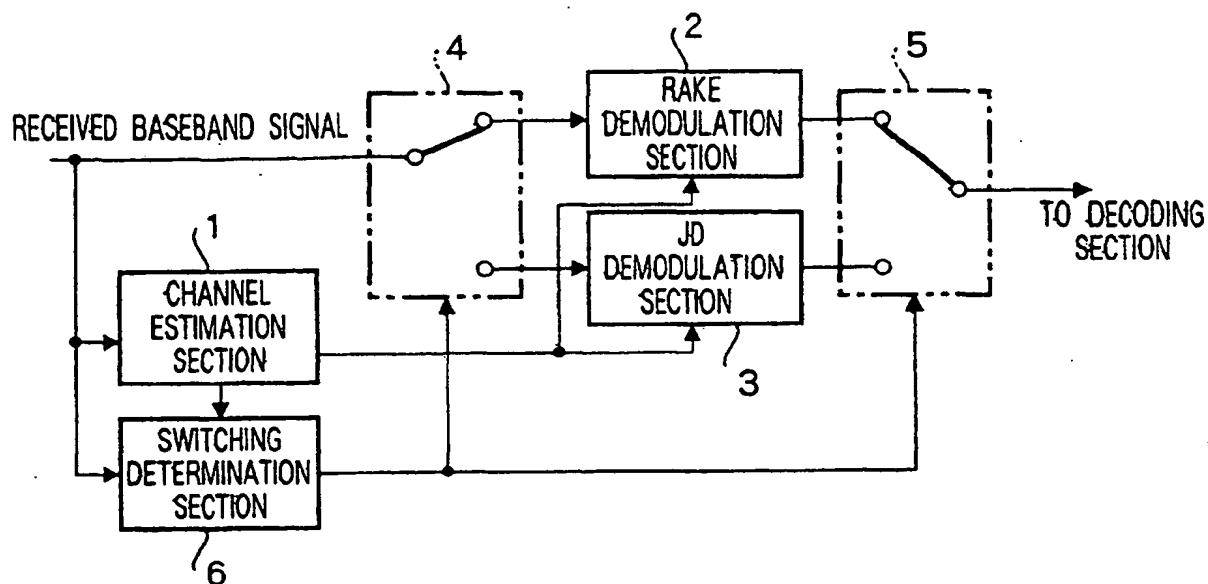


FIG. 1

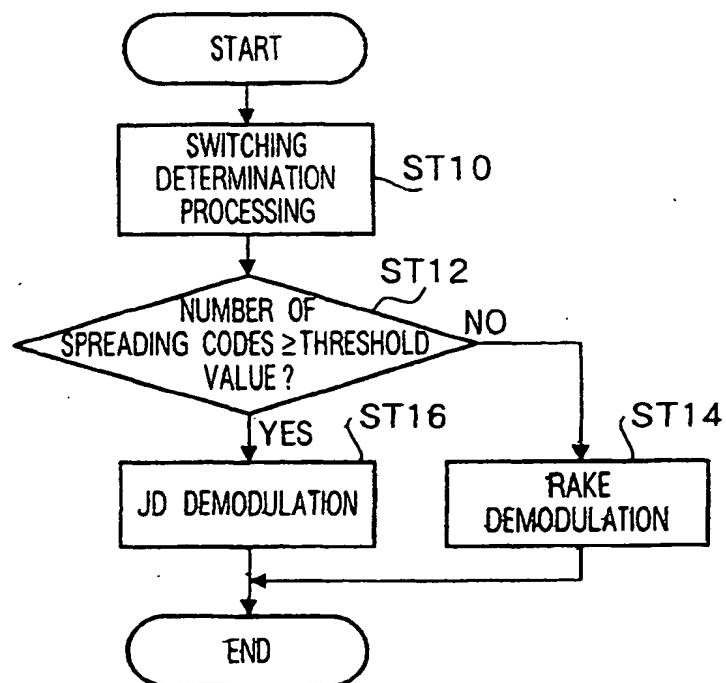


FIG. 2

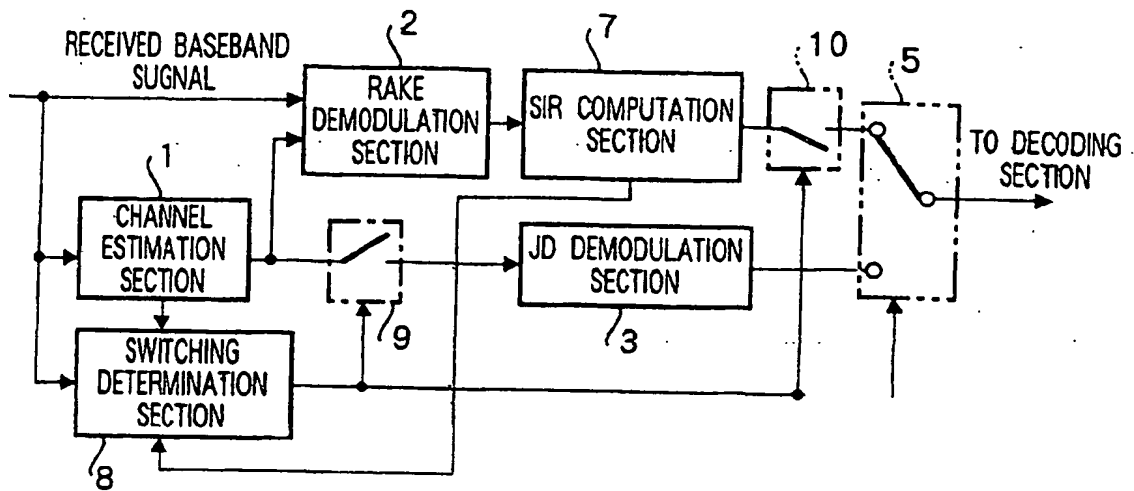


FIG. 3

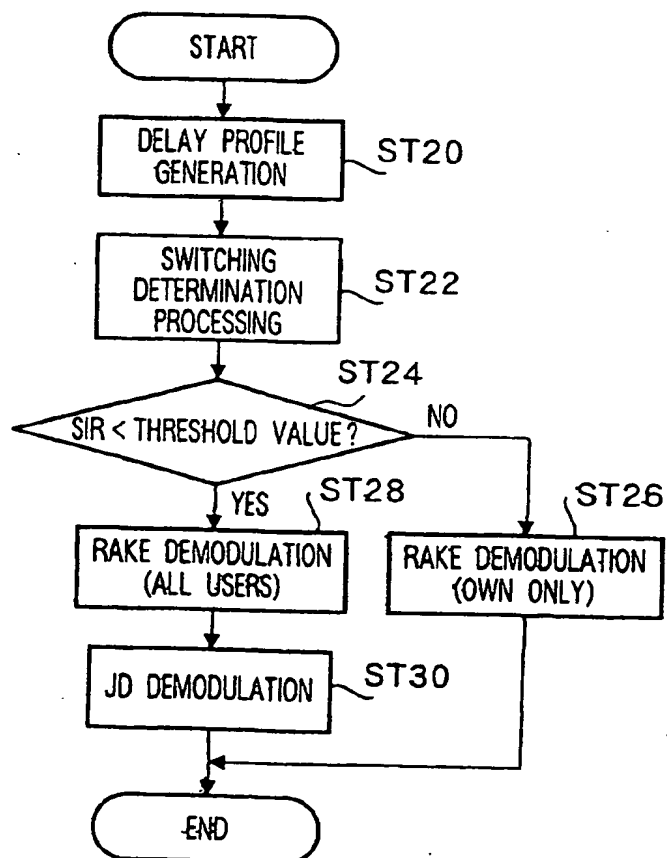


FIG. 4

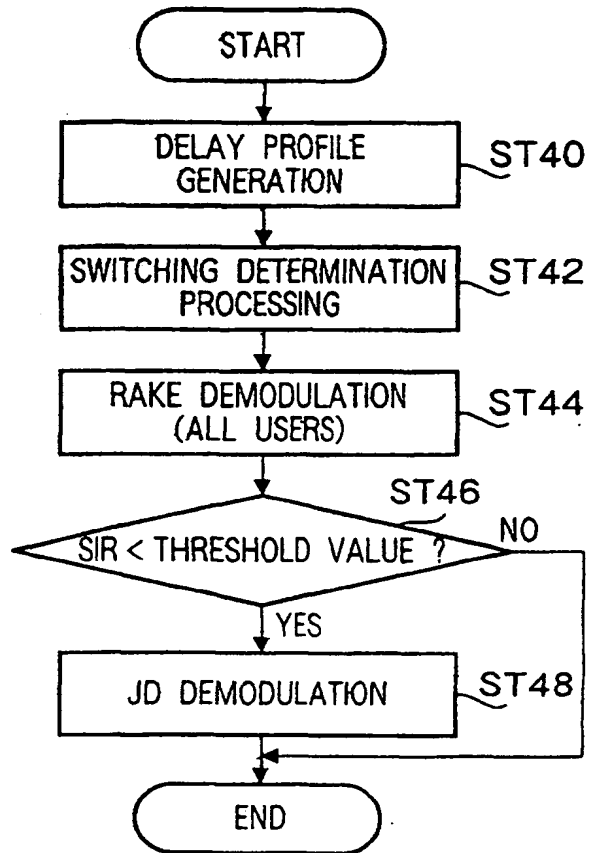


FIG. 5

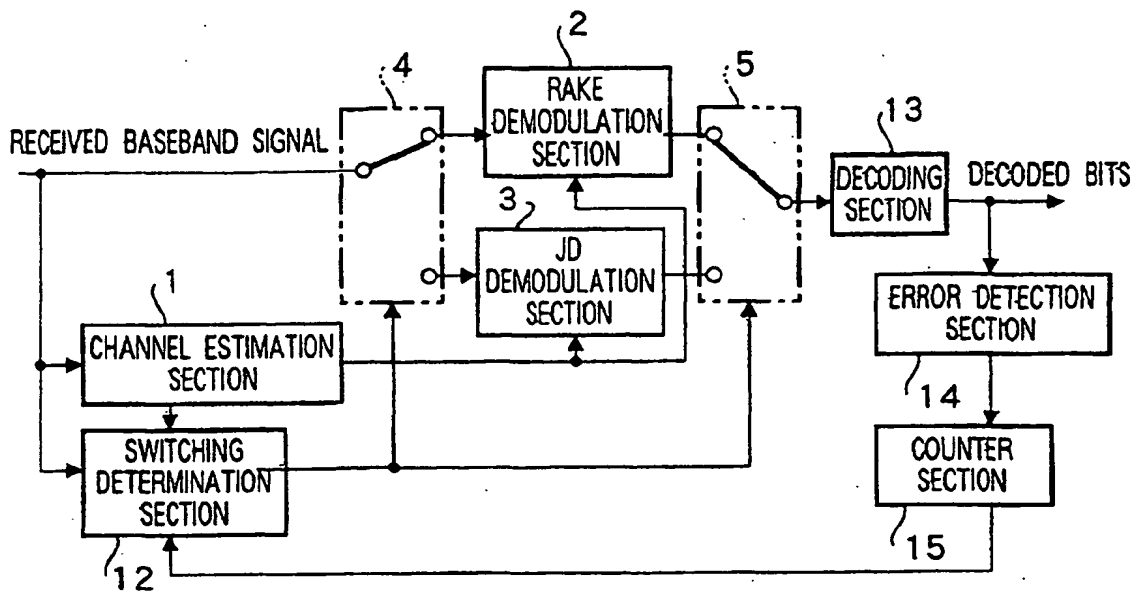


FIG. 6

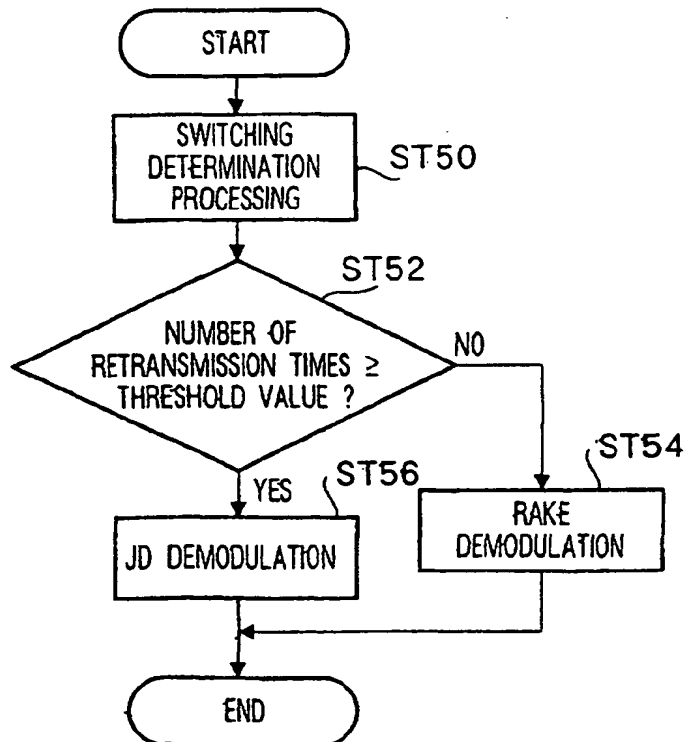


FIG. 7

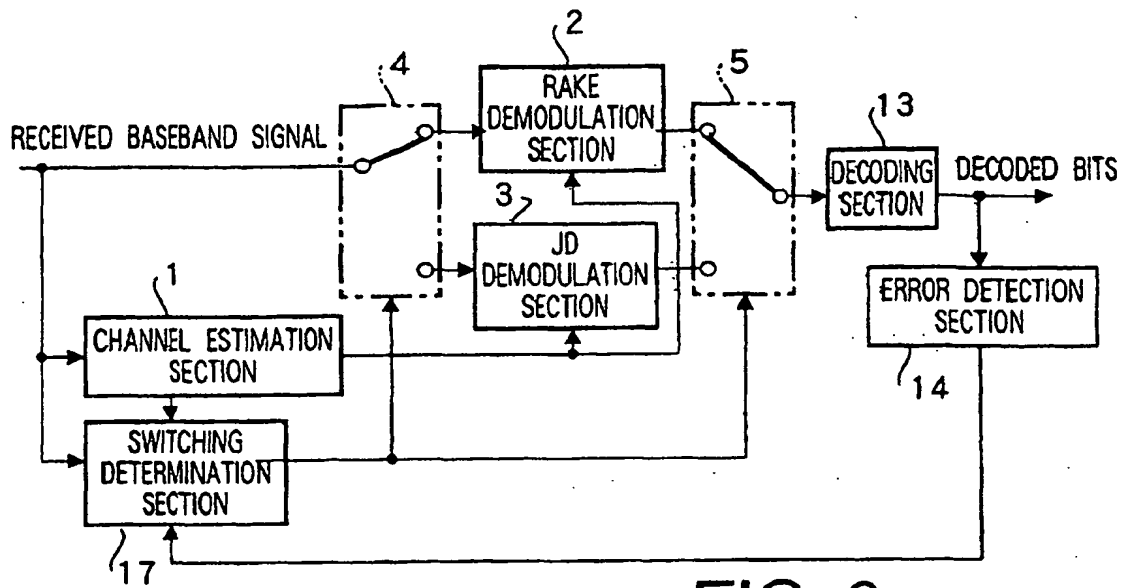


FIG. 8

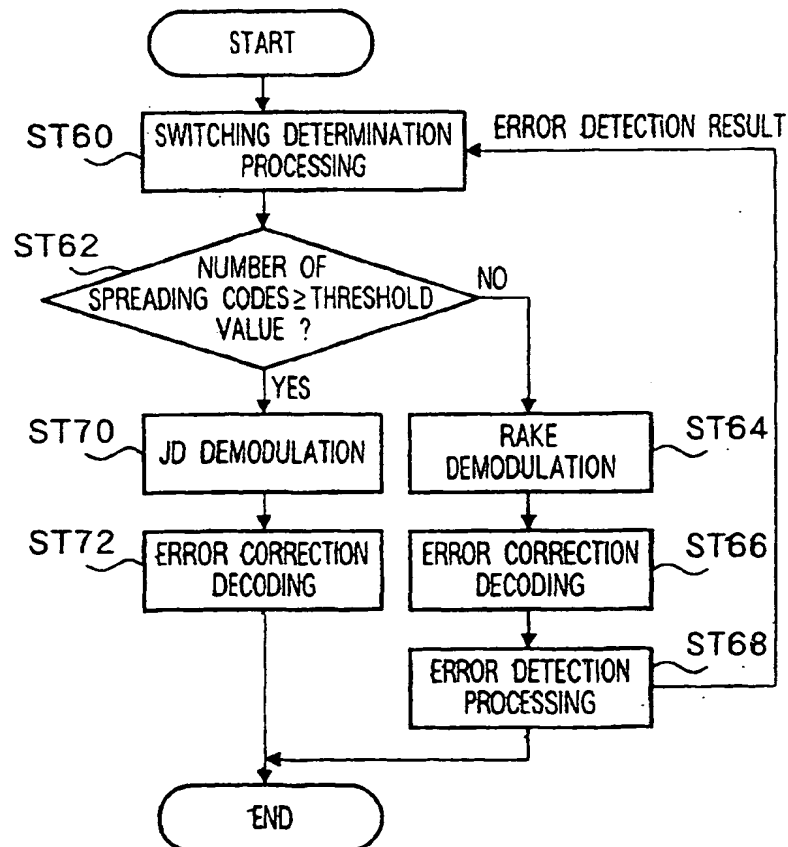


FIG. 9

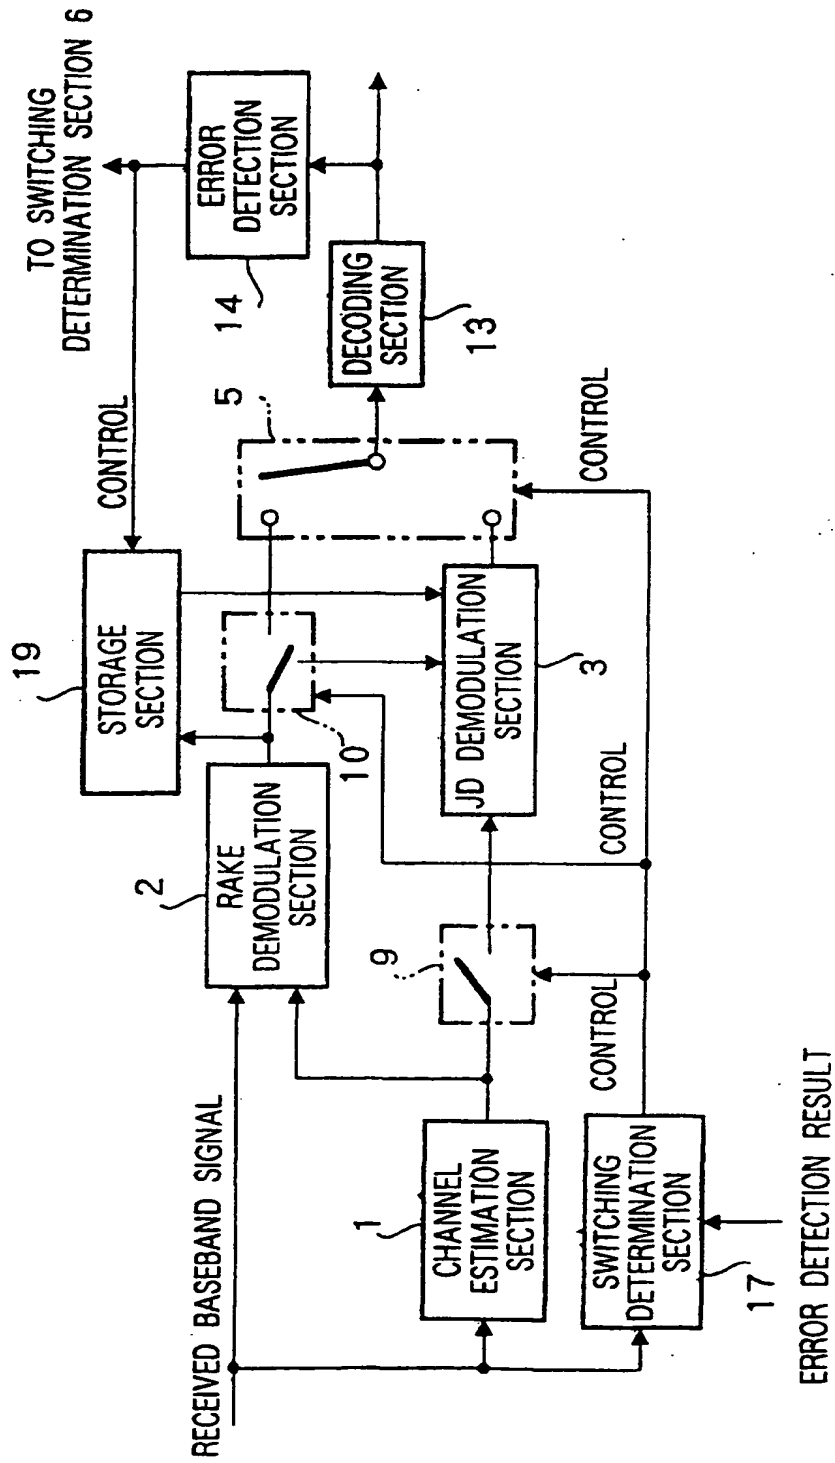


FIG.10

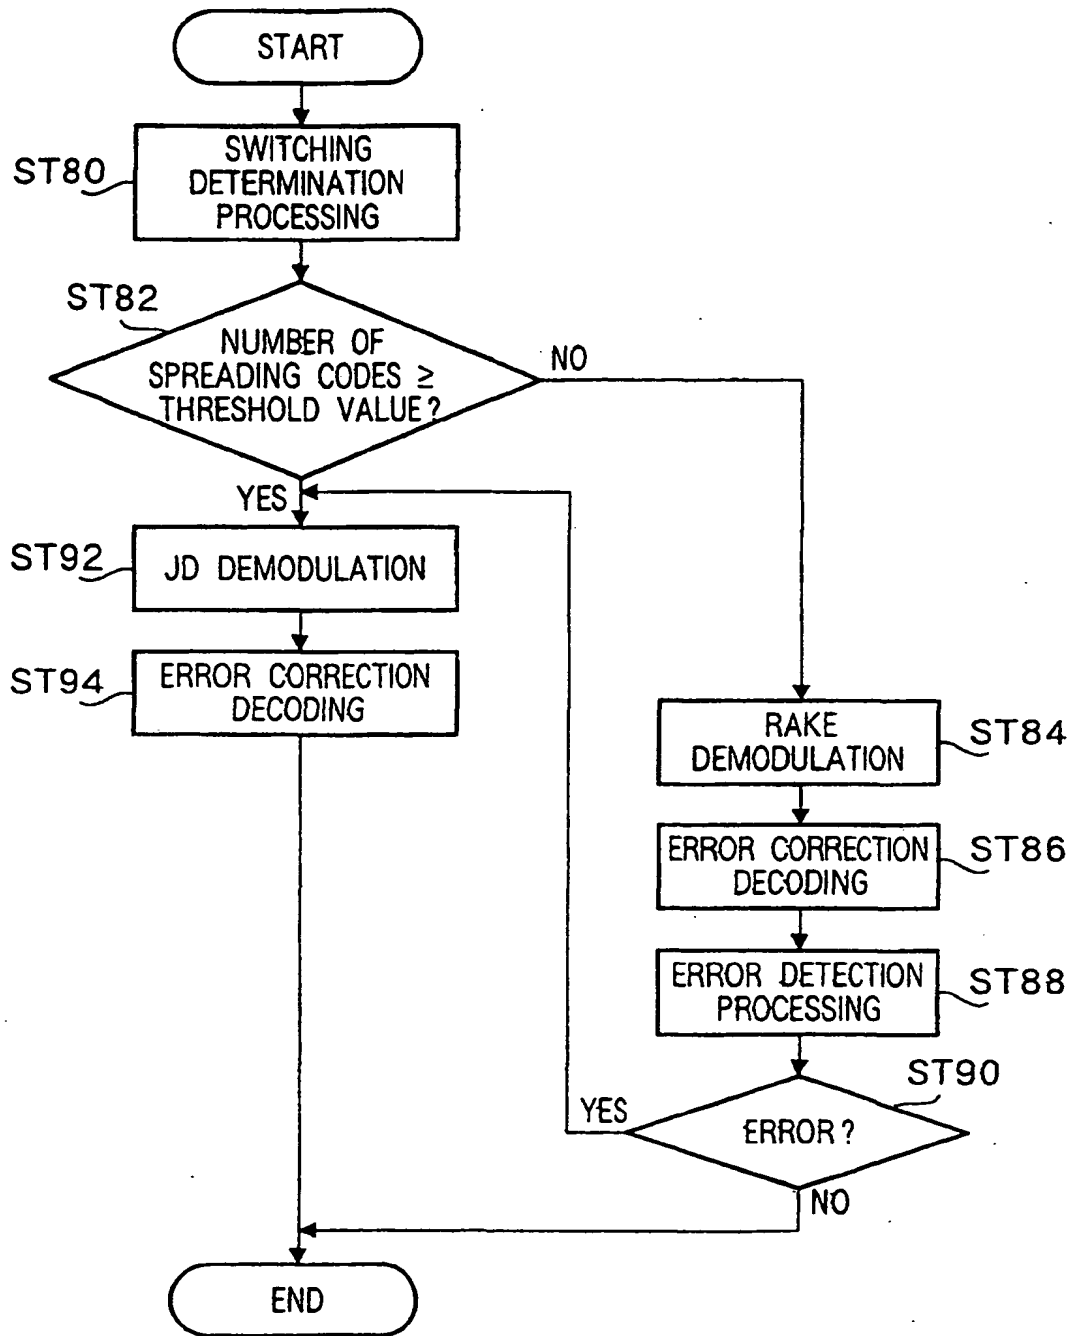


FIG. 11

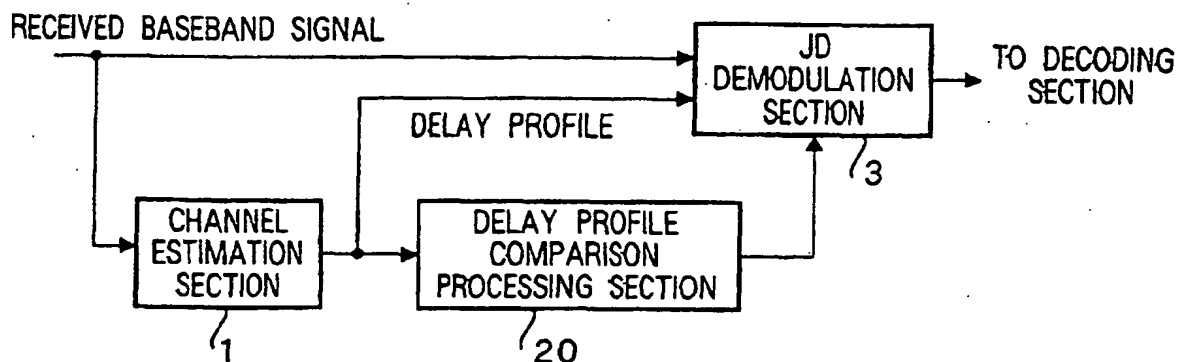


FIG.12

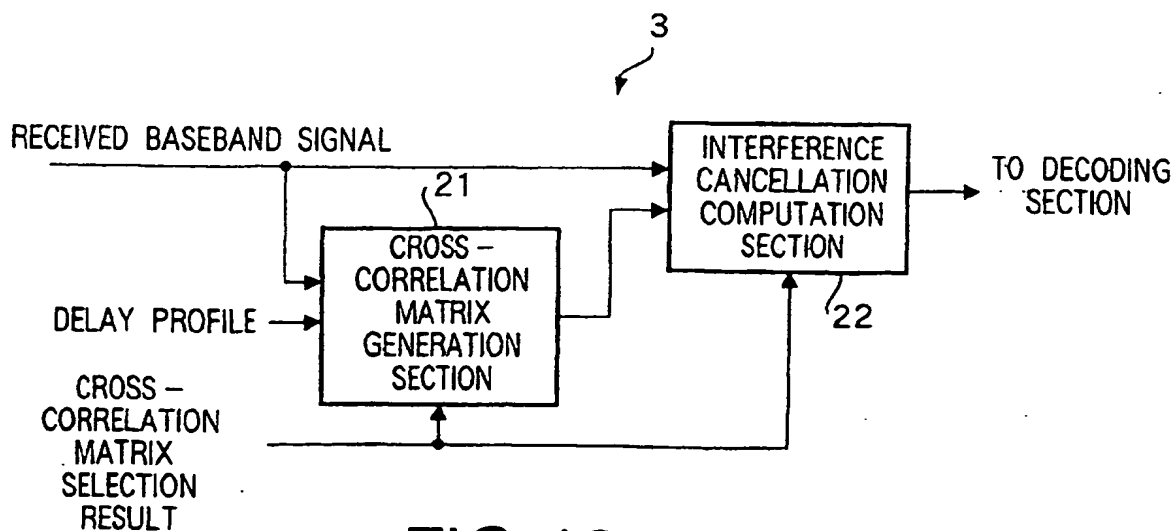


FIG.13

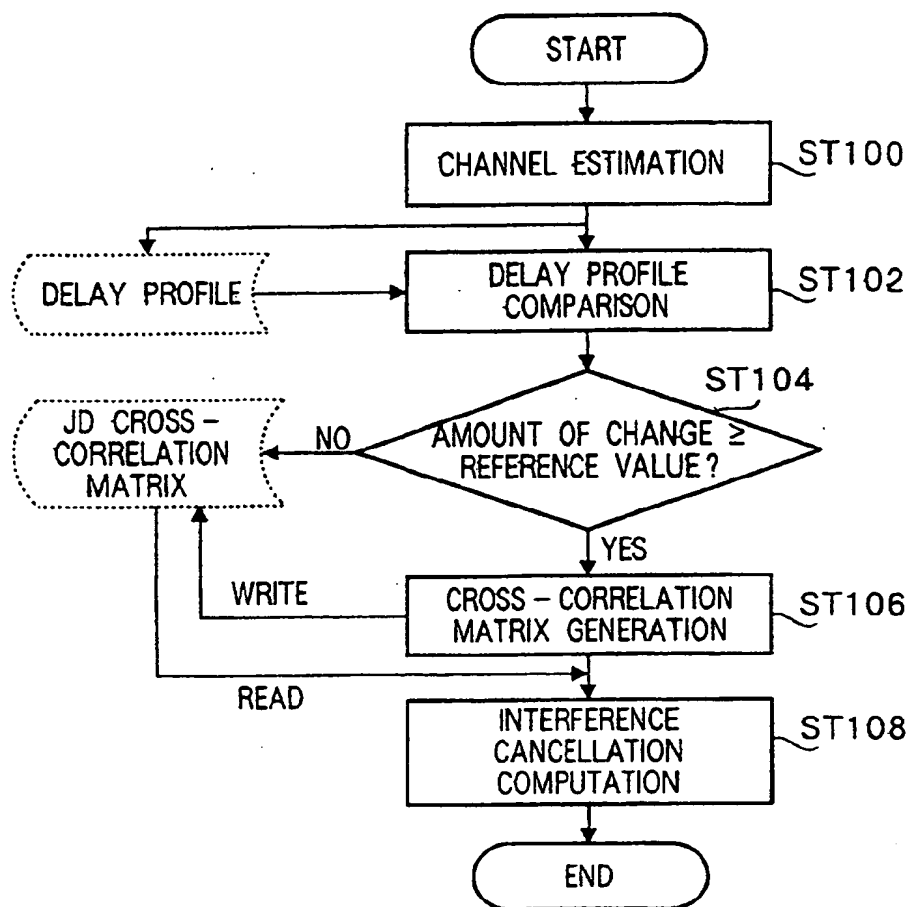


FIG.14

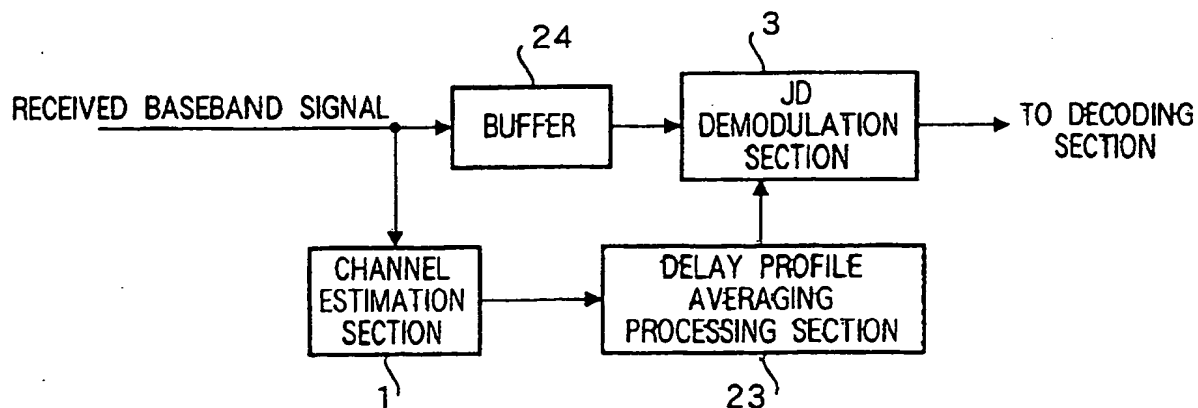


FIG.15

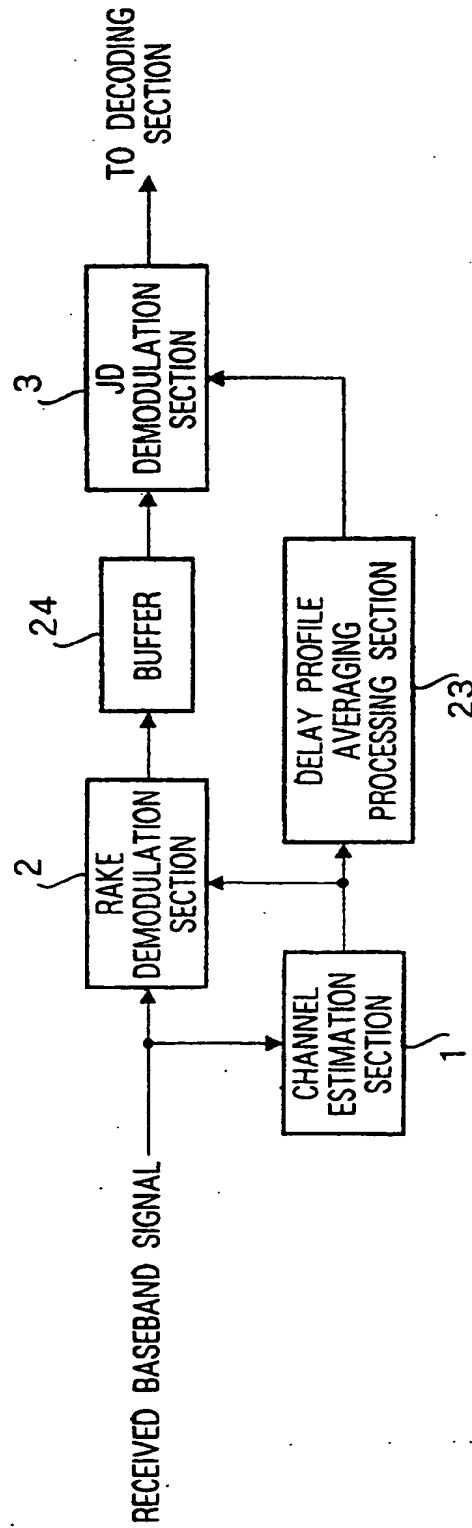


FIG.16

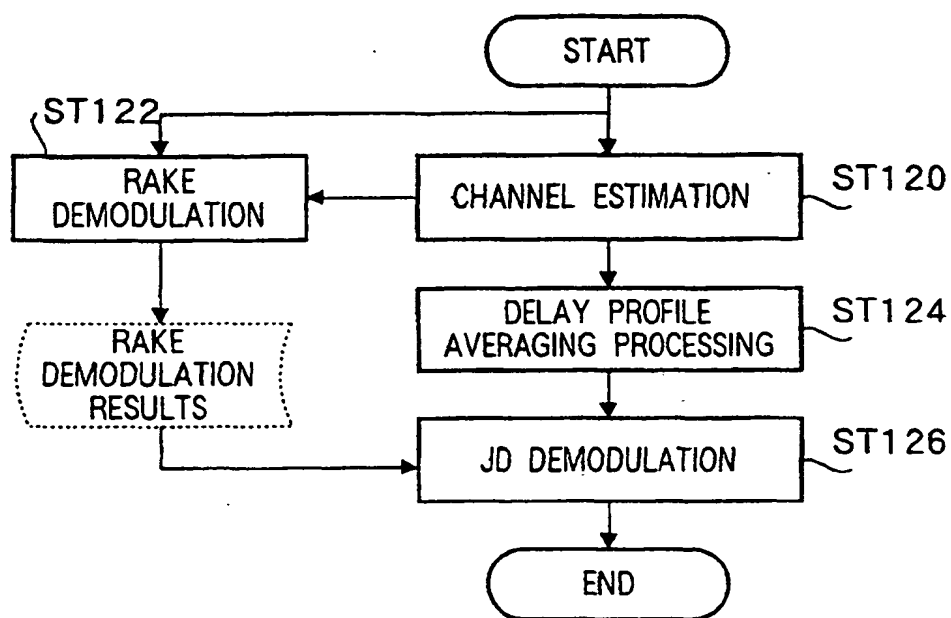


FIG.17

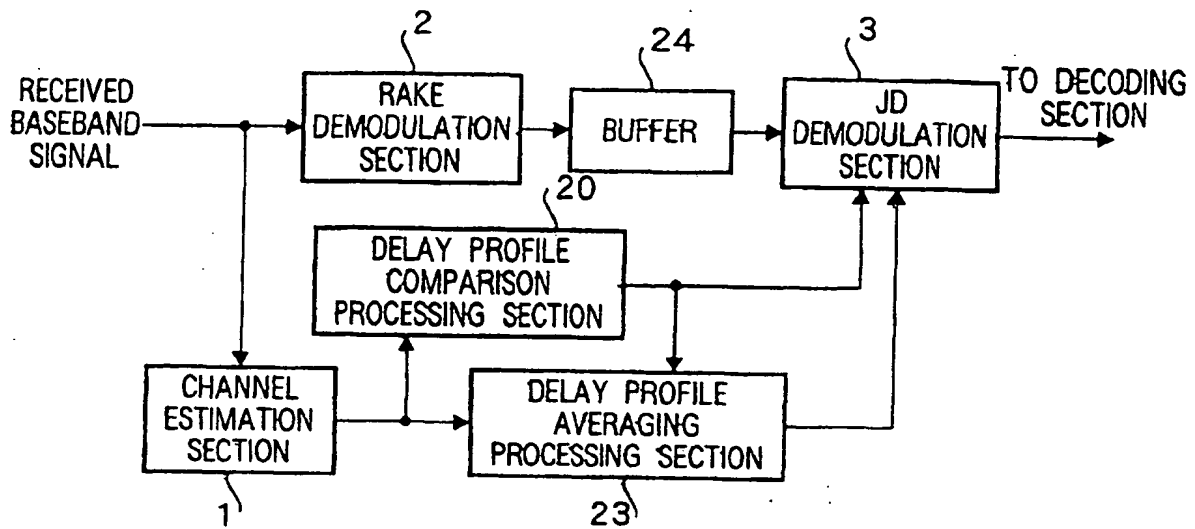


FIG.18

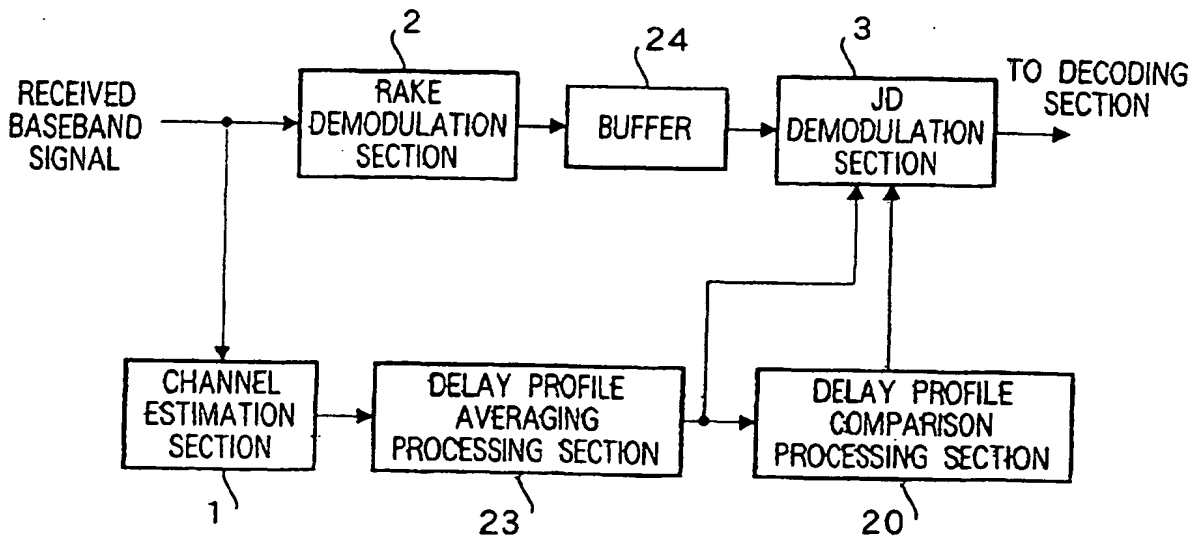


FIG.19

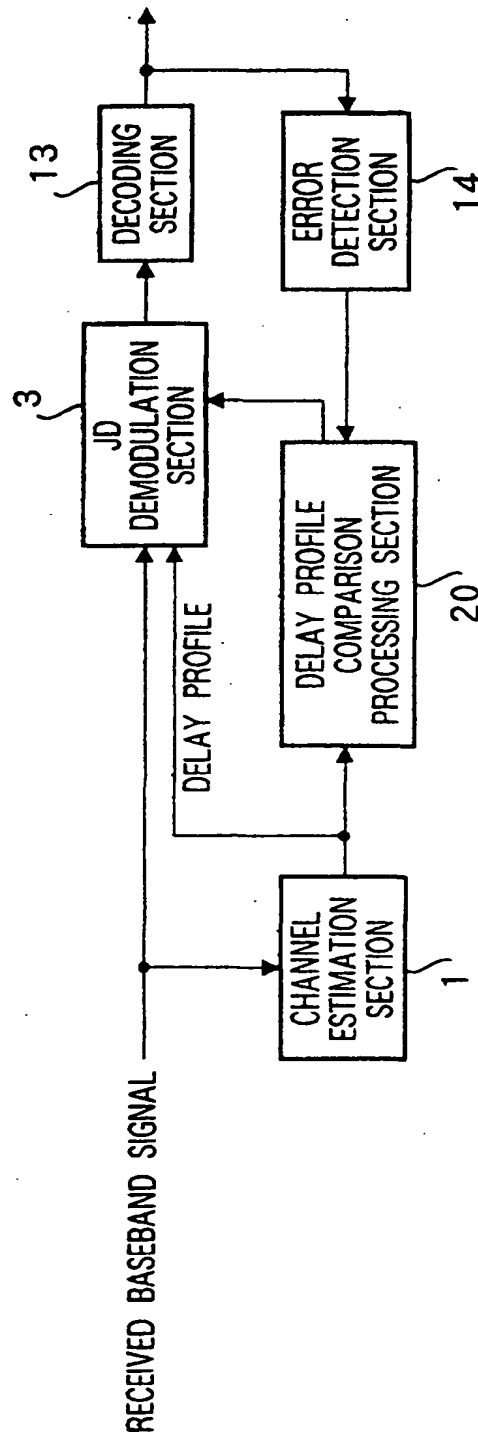


FIG.20

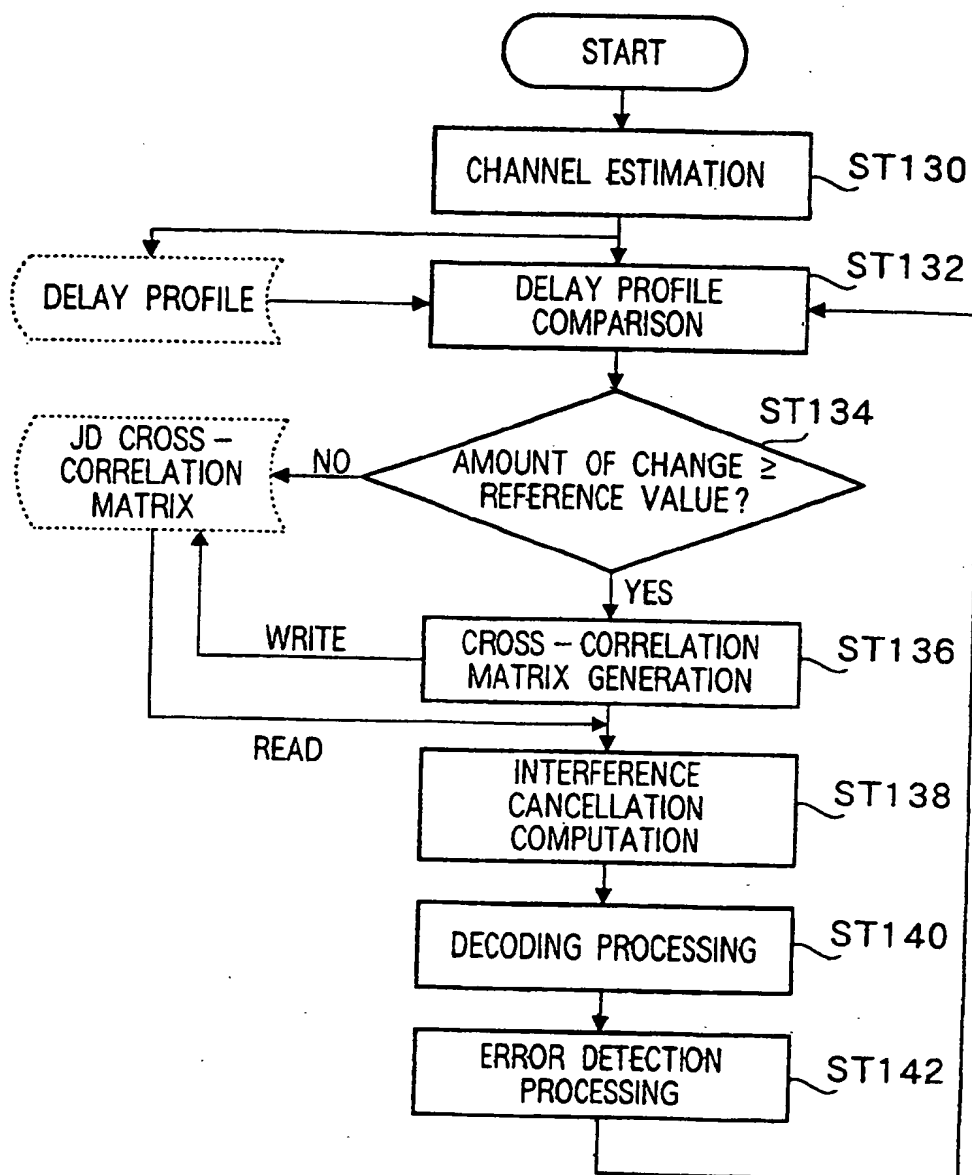


FIG.21

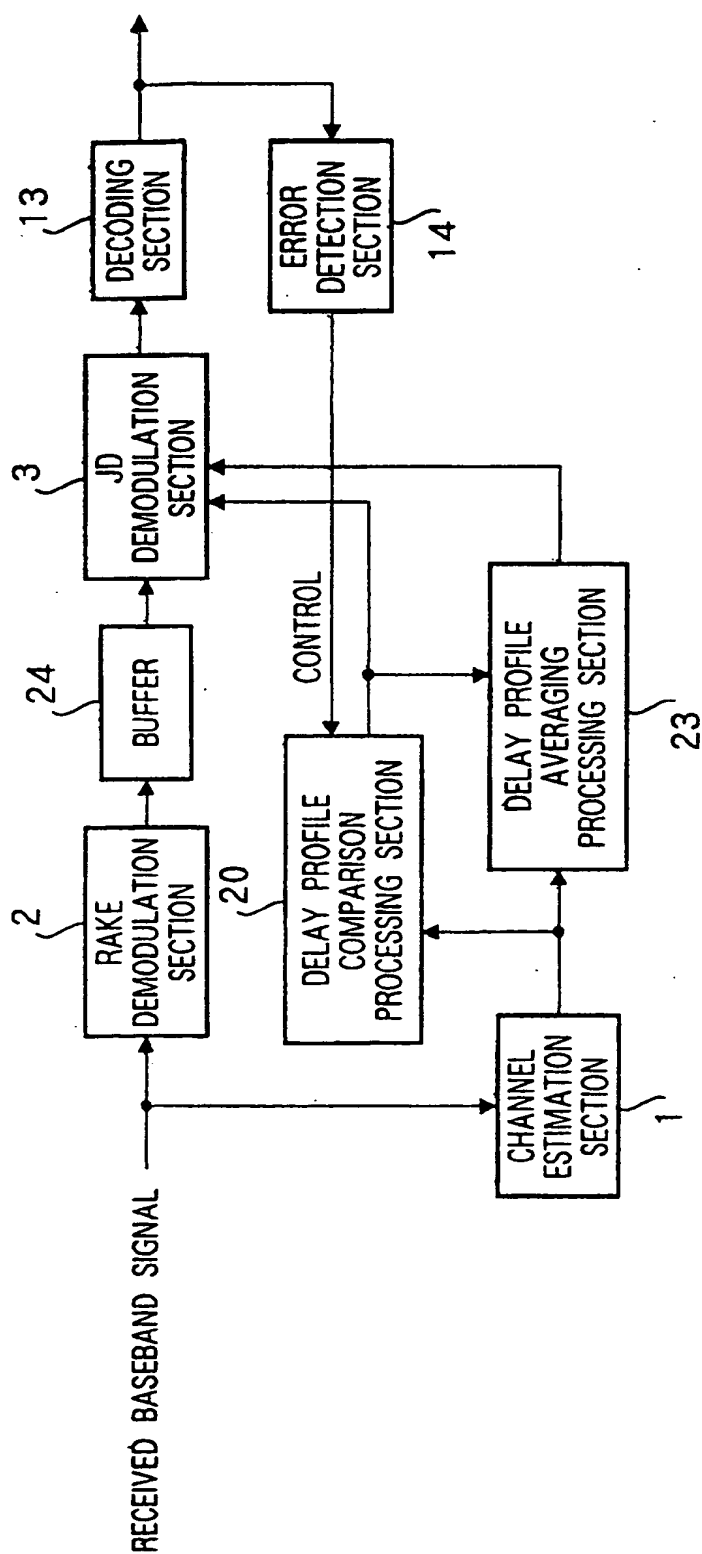


FIG. 22

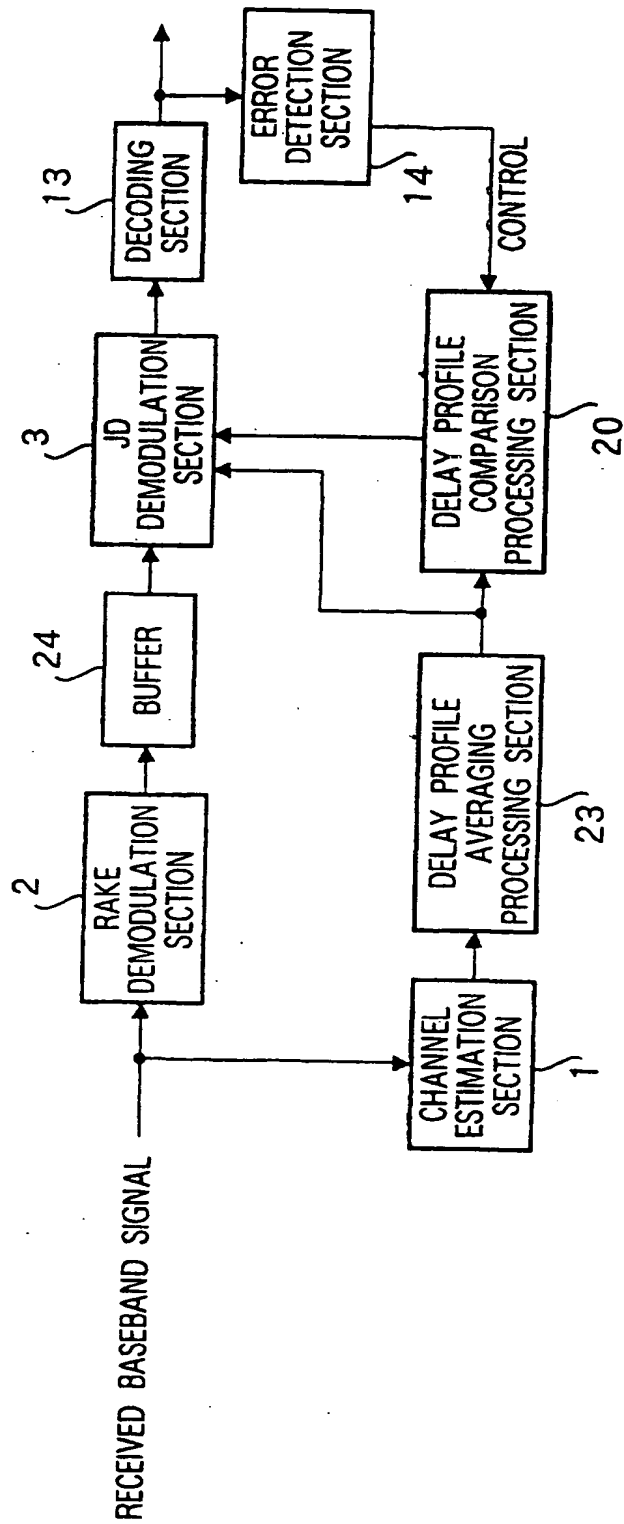


FIG.23

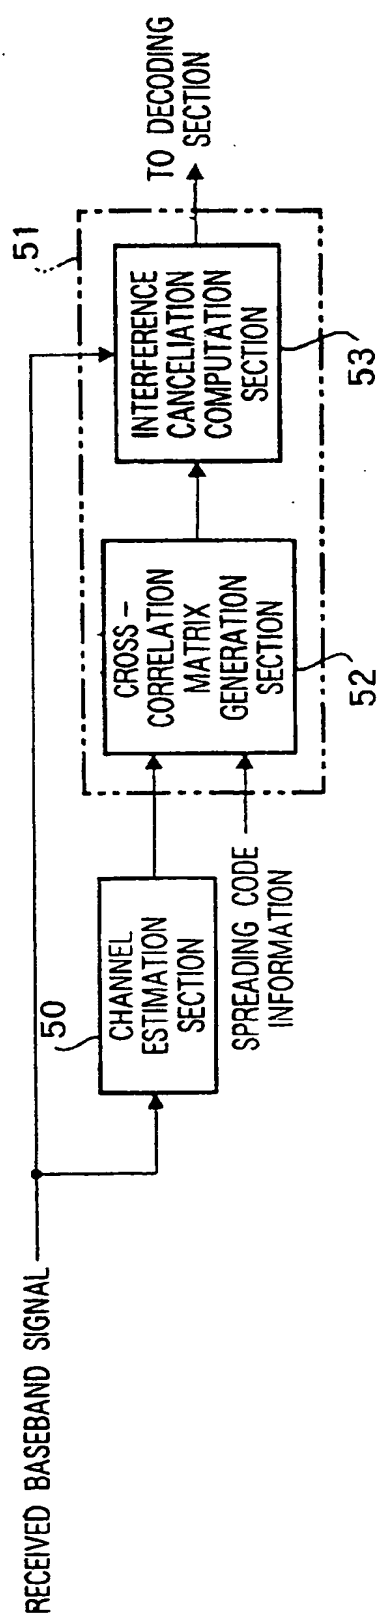


FIG.24

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/08415

A. CLASSIFICATION OF SUBJECT MATTER
Int.Cl.⁷ H04B1/707, H04J13/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.⁷ H04B1/69-1/713, H04J13/00-13/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Jitsuyo Shinan Koho 1926-1996 Toroku Jitsuyo Shinan Koho 1994-2001
Kokai Jitsuyo Shinan Koho 1971-2001 Jitsuyo Shinan Toroku Koho 1996-2001

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
JOIS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2000-216703 A (YRP Idou Tsushin Kiban Gijutsu Kenkyusho K.K.), 04 August, 2000 (04.08.00), page 9, column 15, line 34 to column 16, line 29;	1, 2, 6, 7, 9, 22, 23
A	page 11, column 19, lines 6 to 21; Figs. 5, 6 (Family: none)	3-5, 8, 10-21, 24, 25
Y	JP 2000-261412 A (Matsushita Electric Ind. Co., Ltd.), 22 September, 2000 (22.09.00), Full text; all drawings	1, 2, 6, 7, 9, 22, 23
A	& WO 00/54446 A1 & AU 200028265 A & EP 1077551 A1 & CN 1296683 A & KR 2001043357 A	3-5, 8, 10-21, 24, 25
A	JP 2000-13360 A (NEC Corporation), 14 January, 2000 (14.01.00), Full text; all drawings & EP 967734 A2 & CN 1241070 A & KR 2000006470 A	1-25

☒ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search
10 December, 2001 (10.12.01)

Date of mailing of the international search report
18 December, 2001 (18.12.01)

Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/08415

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	EP 1128564 A1 (Lucent Technologies, Inc.), 29 August, 2001 (29.08.01), Full text; all drawings (Family: none)	1-25
P, A	JP 2001-285254 A (Matsushita Electric Ind. Co., Ltd.), 12 October, 2001 (12.10.01), Full text; all drawings (Family: none)	1-25
P, A	JP 2001-251236 A (Matsushita Electric Ind. Co., Ltd.), 14 September, 2001 (14.09.01), Full text; all drawings & WO 01/67639 A1	1-25

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.